



**Elements of nature,
naturalness in your space.**

600x1200mm

 **ANAKON**
FLOOR & WALL TILES

|

Make A Statement With Surfaces That Exude Timeless
Beauty Through Understated Elegance, Elevating Your
Space To Extravagant Sophistication.



The Detailed Architectural Elegance Of Our Surfaces Will Leave You In Awe And Inspire You To Create Spaces That Radiate Timeless Beauty And Unmatched Style.

Luxury Through Our Glossy Surfaces That Are Meant To Elevate The Grace Of Your Space.



APPLICATION



COMMERCIAL
BUILDING



HOTEL &
RESTAURANT



GYMNASIUM



HALL &
CARRIDOR



AIRPORT



SCHOOL &
COLLEGE




INDUSTRY



SPA & WELLNESS
CENTRES

These are the most common
type of surfaces used for your place.

FEATURES



HIGH
STRENGTH



CHEMICAL
RESISTANCE



STAIN
RESISTANT



EASY
TO CLEAN



EASY
MAINTENANCE



DIMENSIONAL
STABILITY





SLIP
RESISTANT





ECO
FRIENDLY

Here are a few of the main features that
make these tiles a practical yet versatile stylish option.




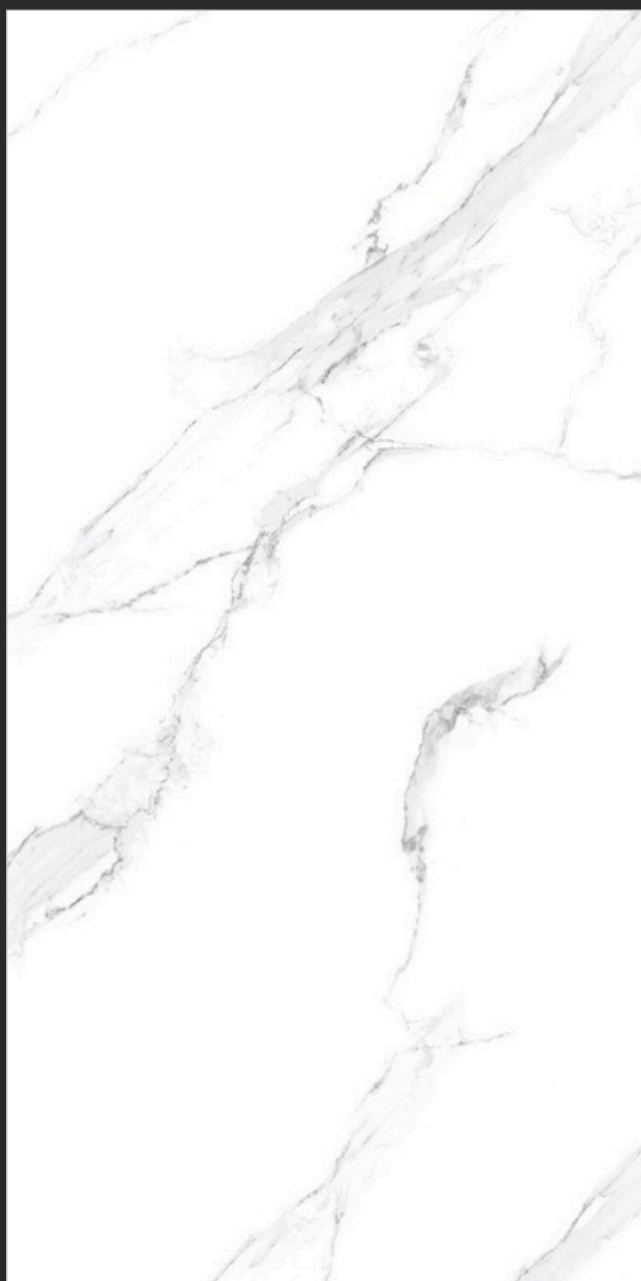



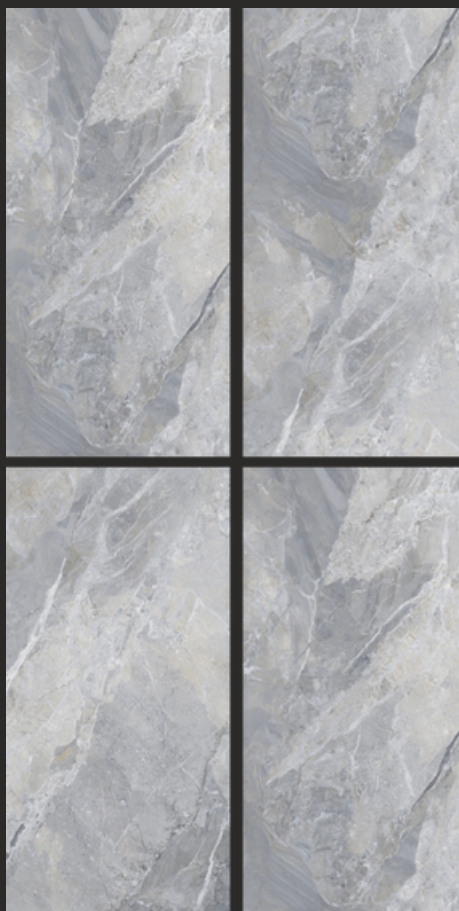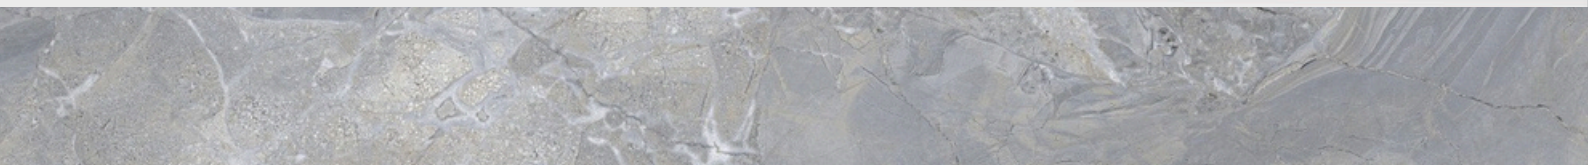






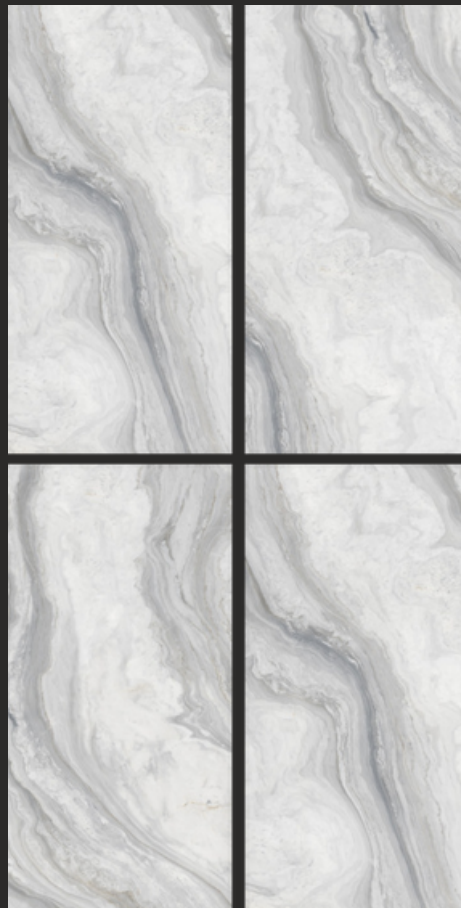









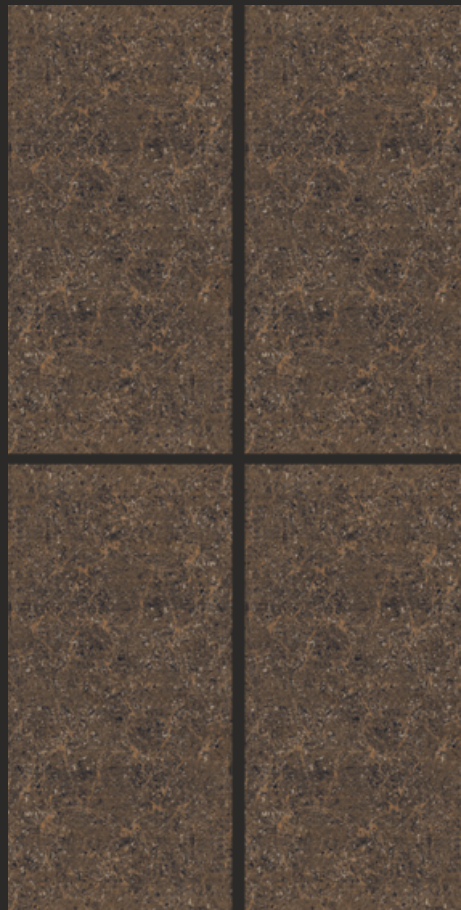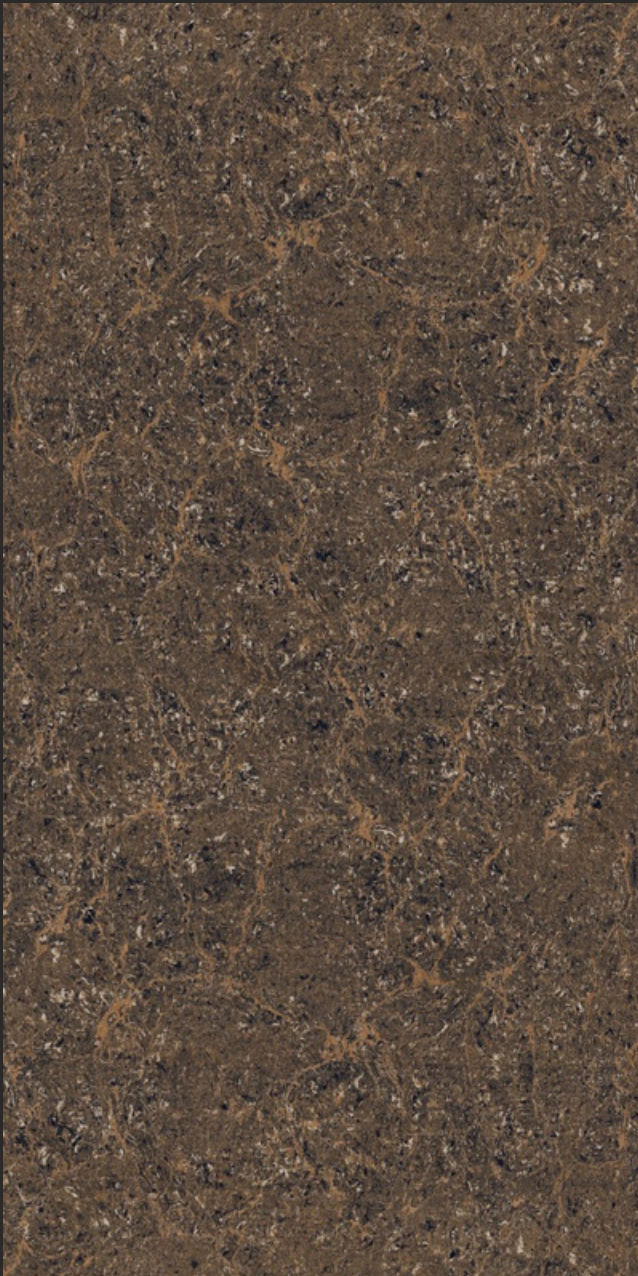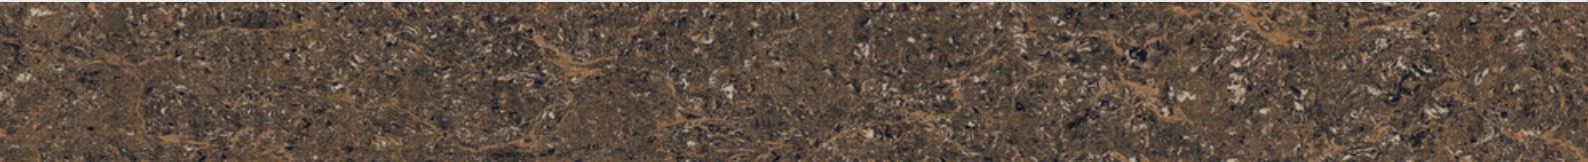




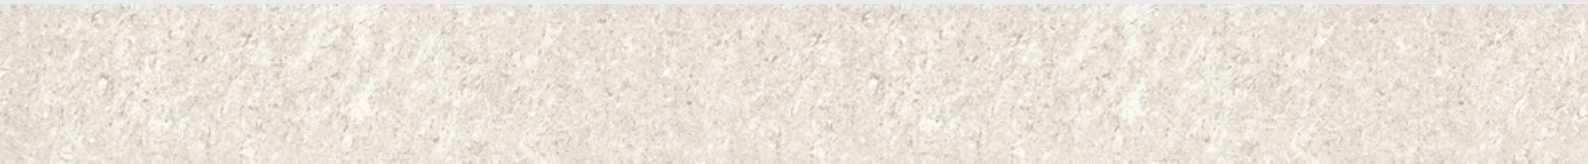





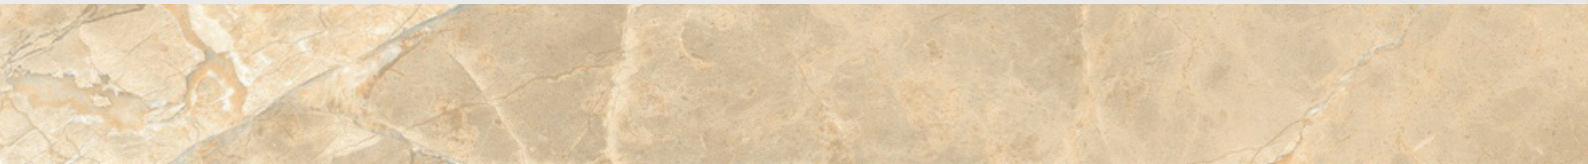




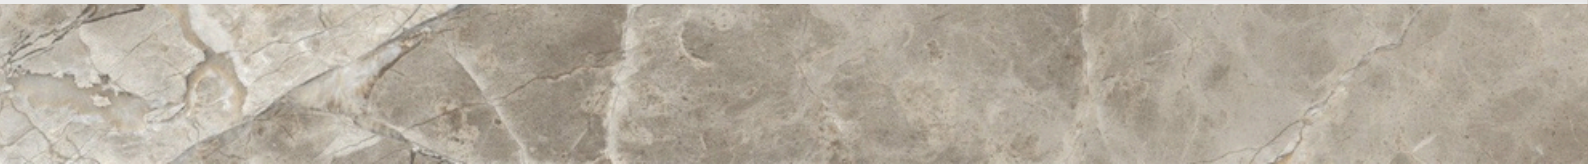




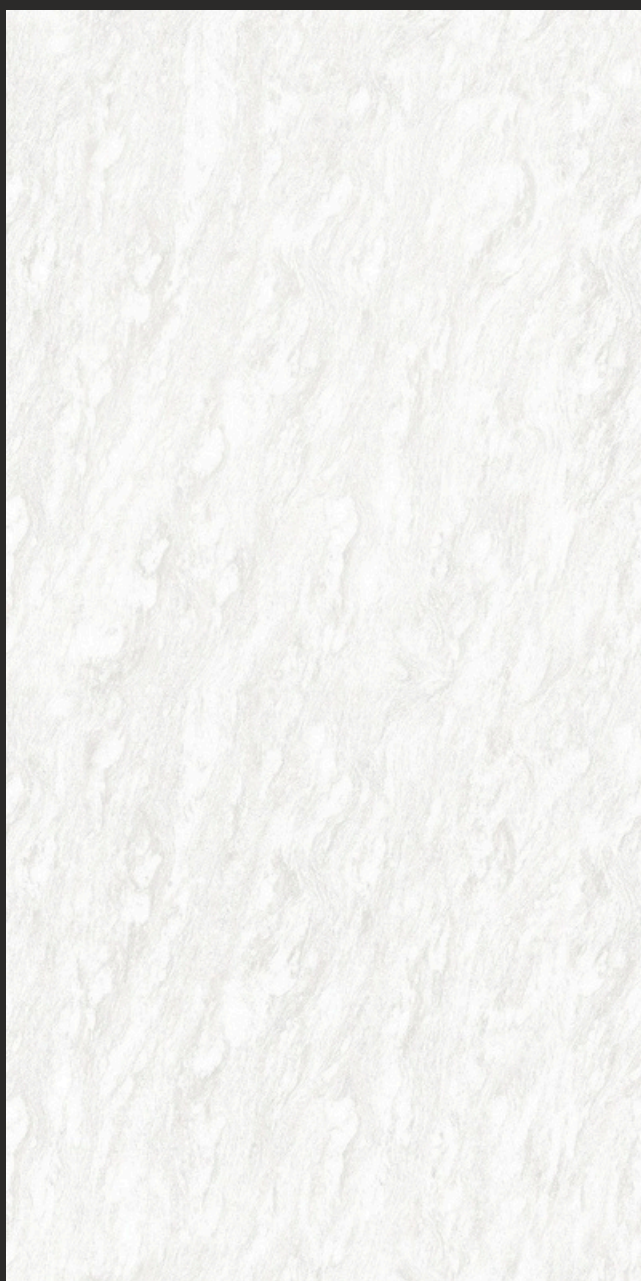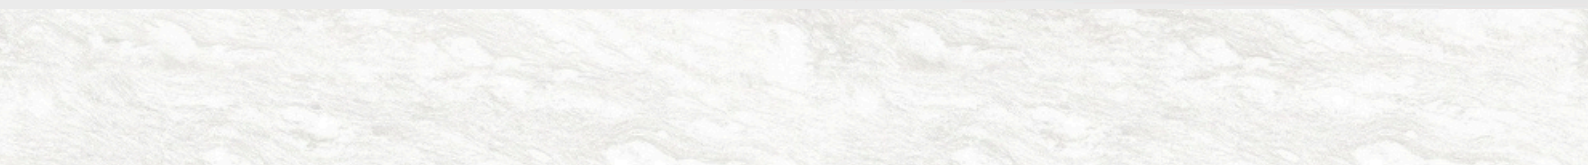



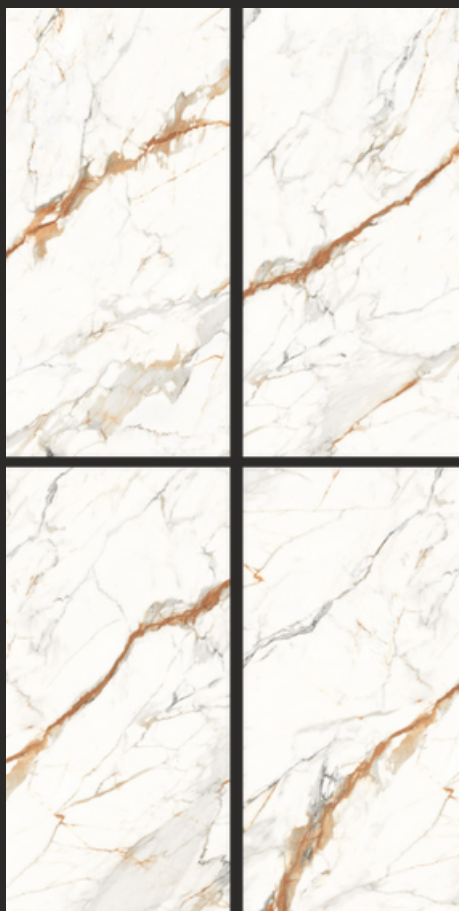





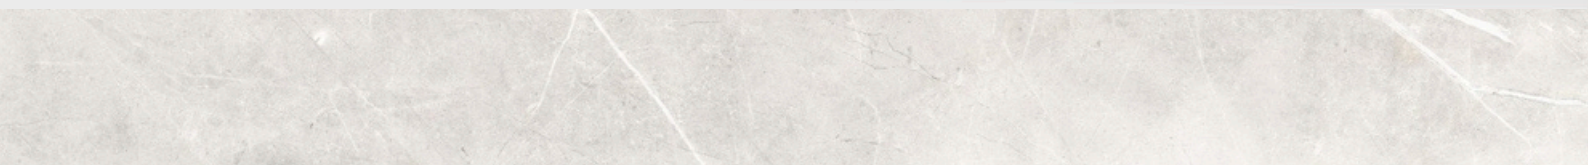








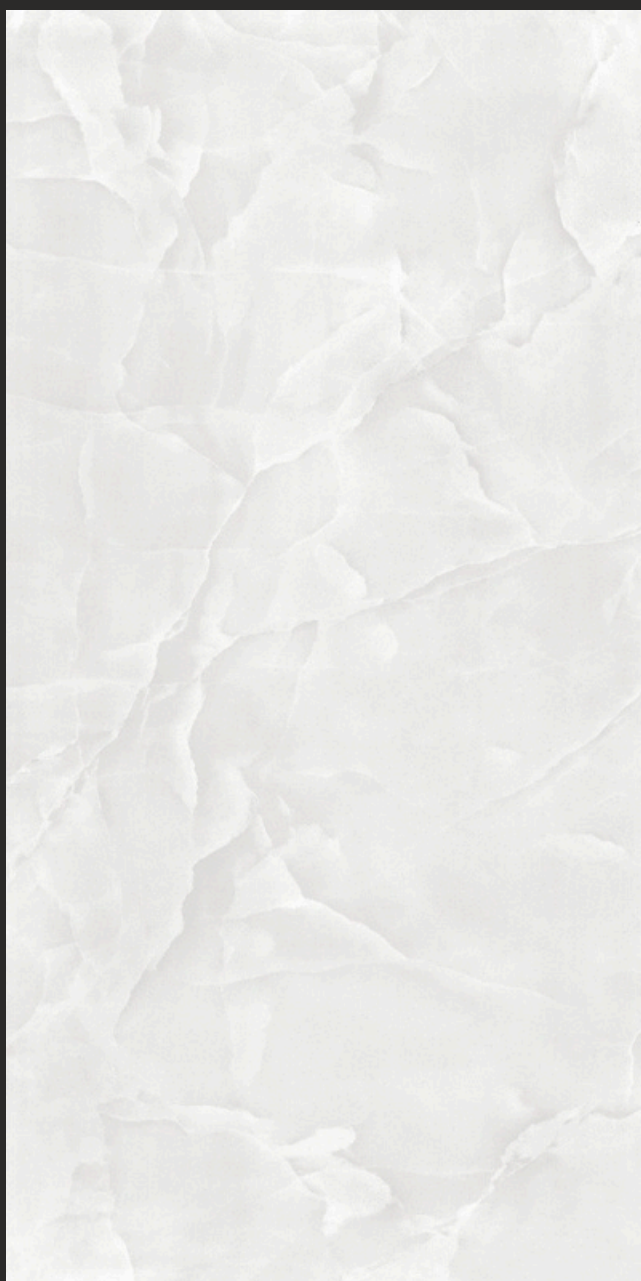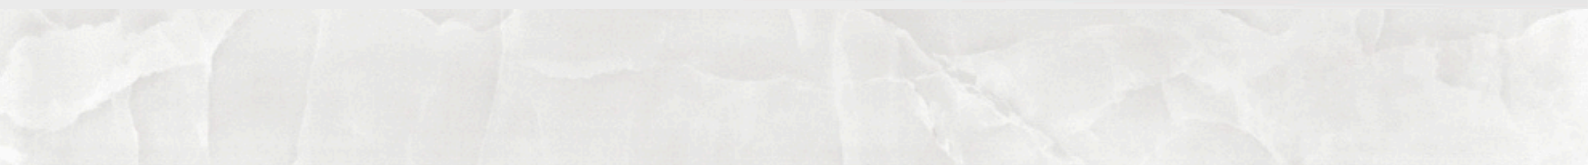



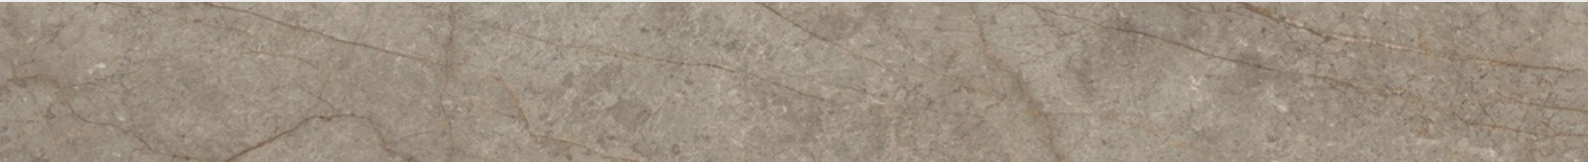
















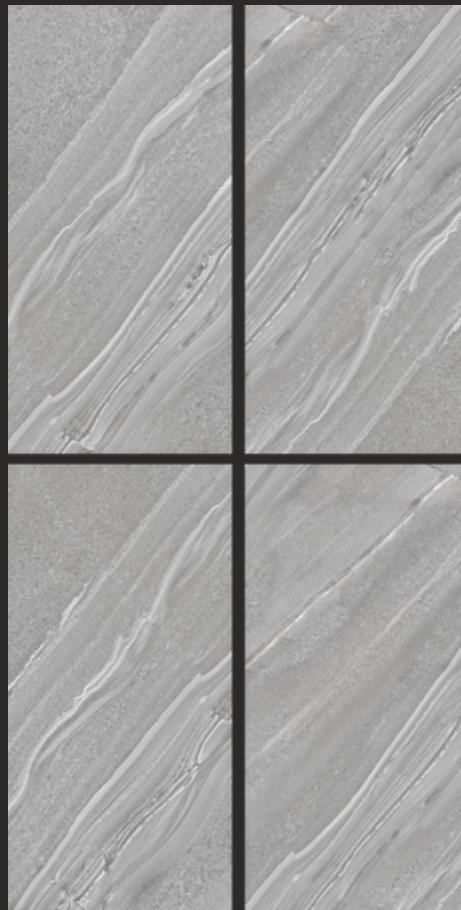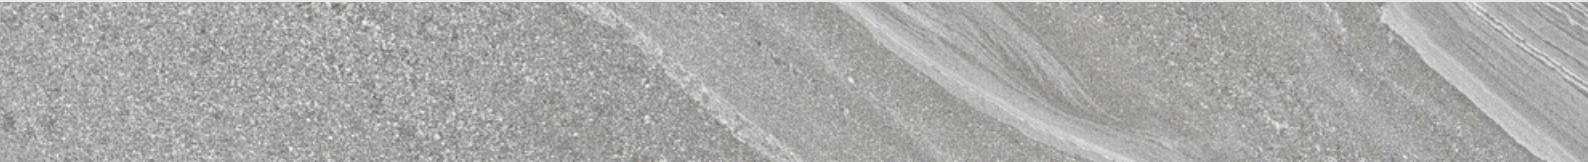




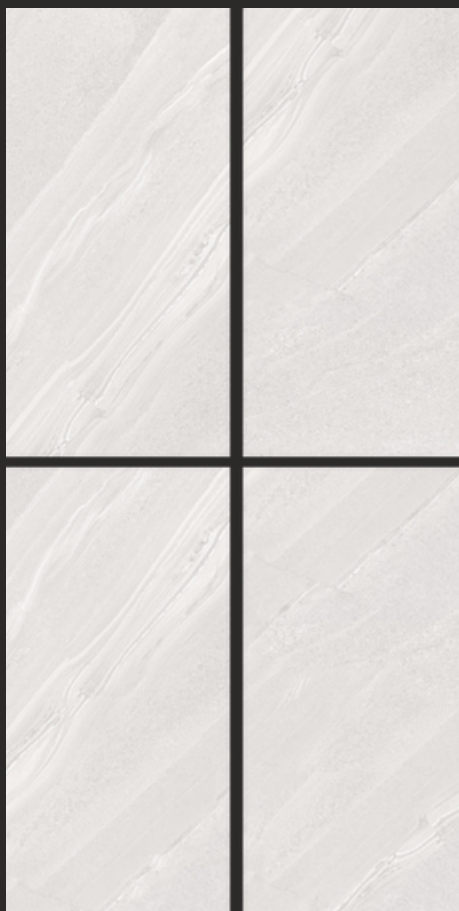



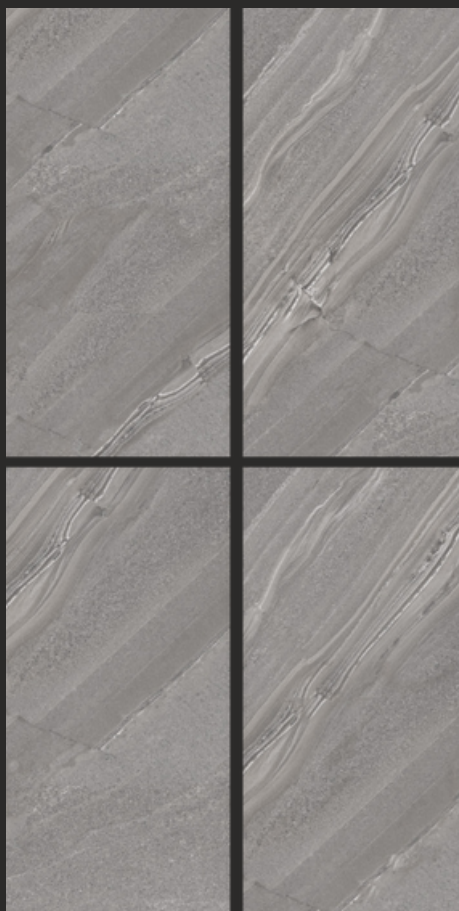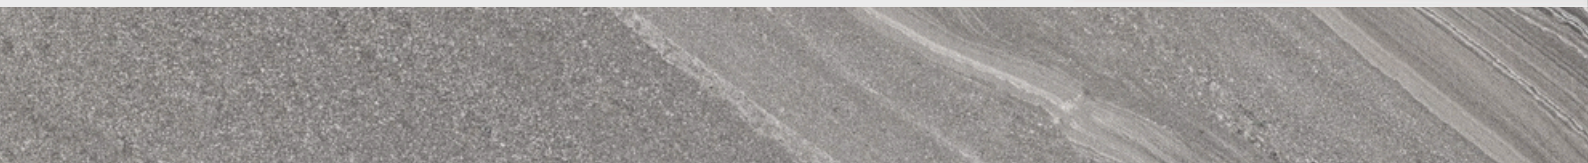




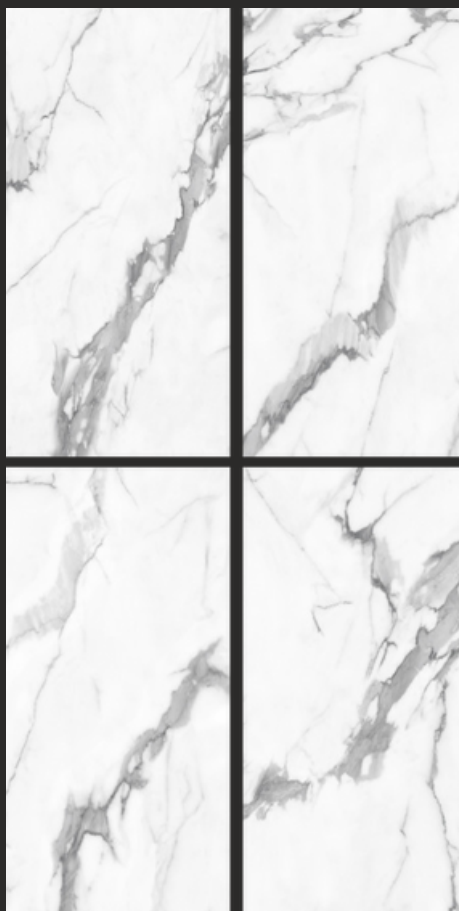










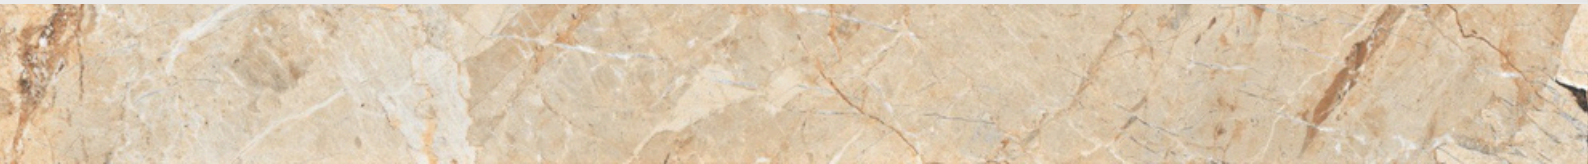



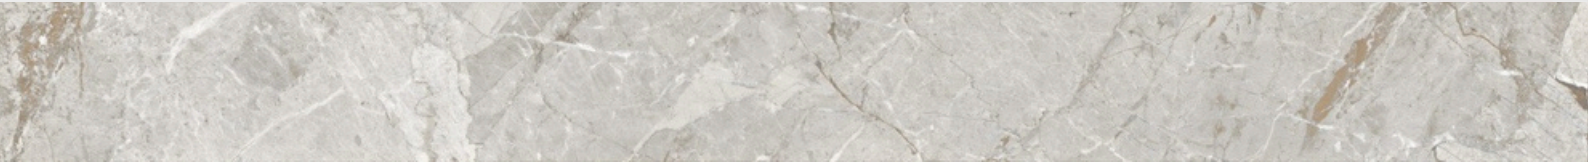




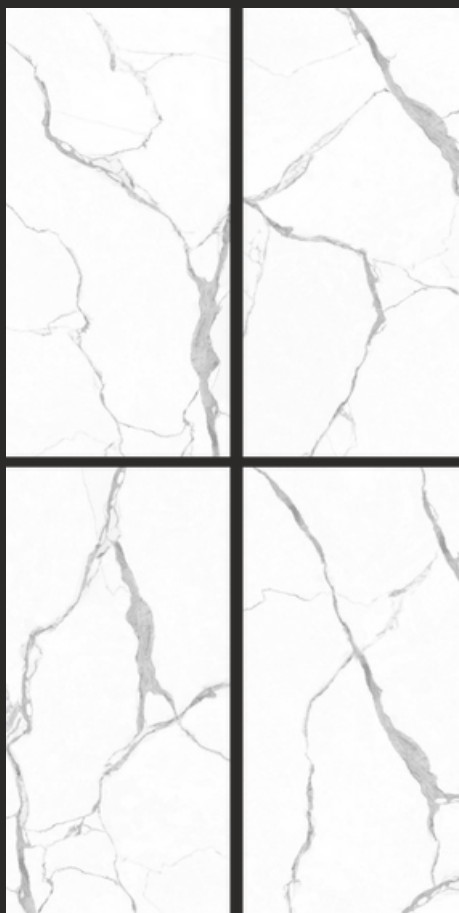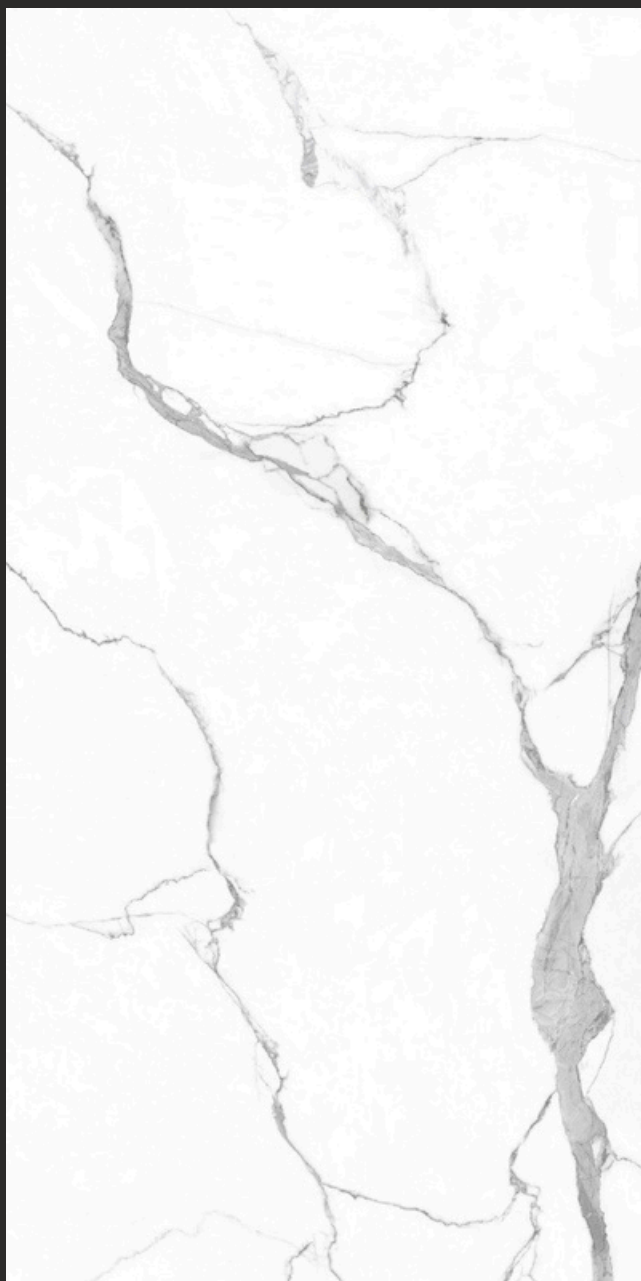








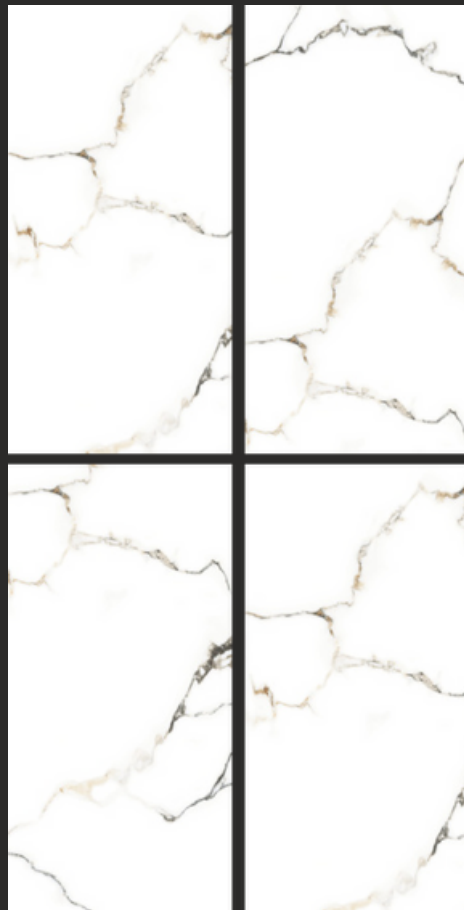



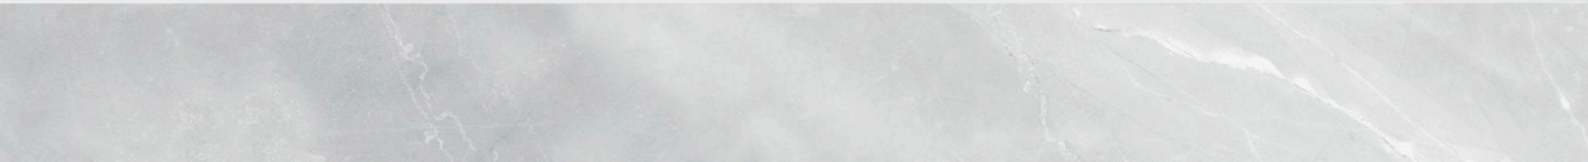












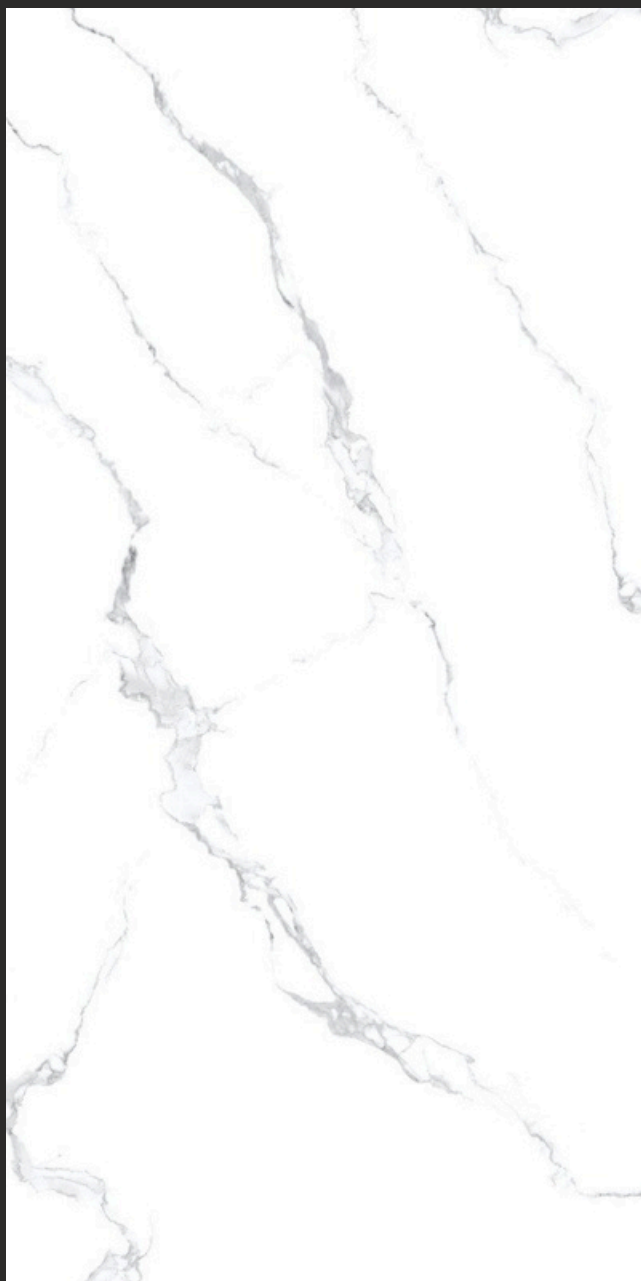













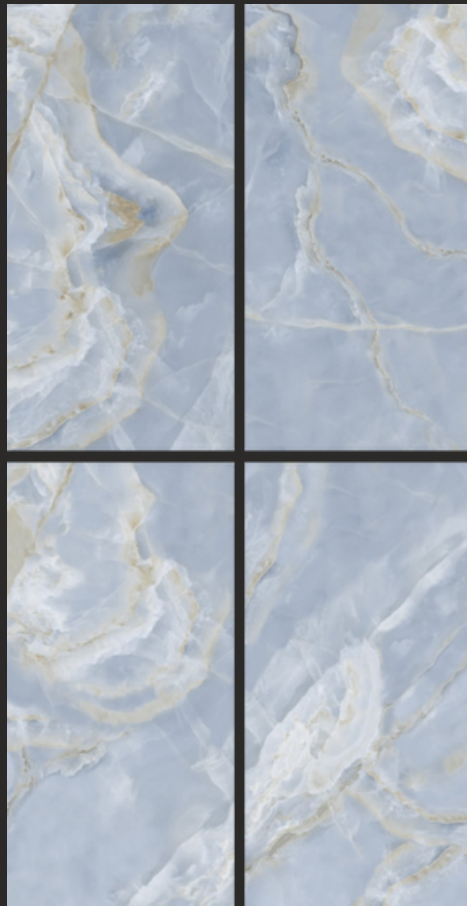









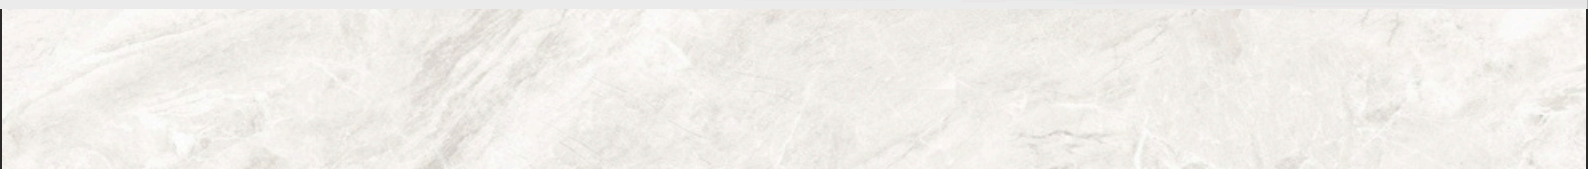



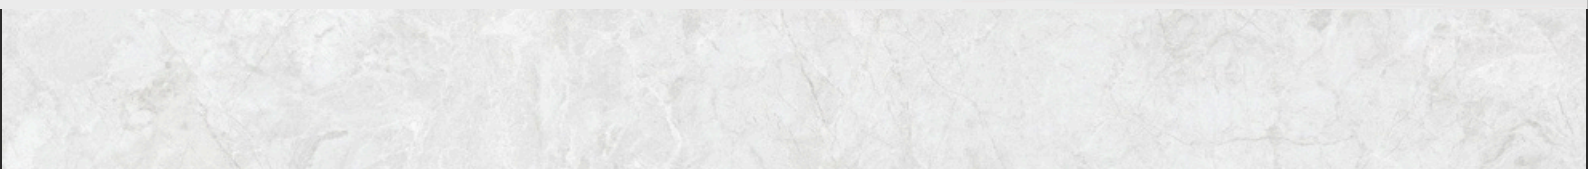




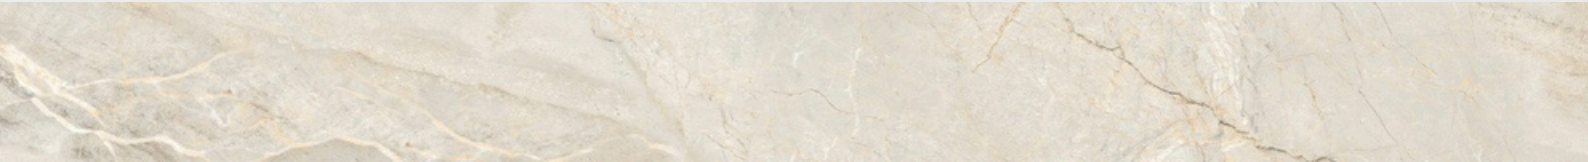










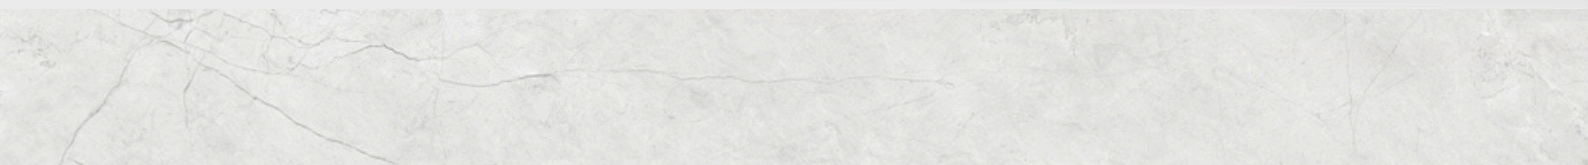




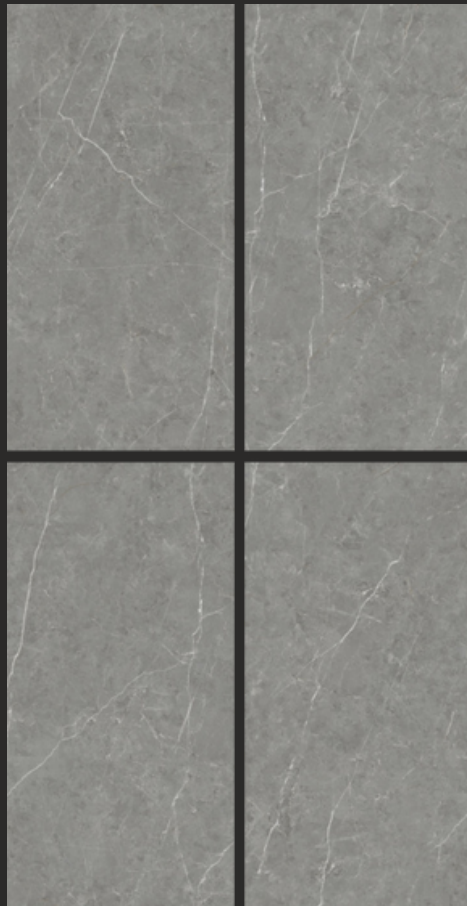





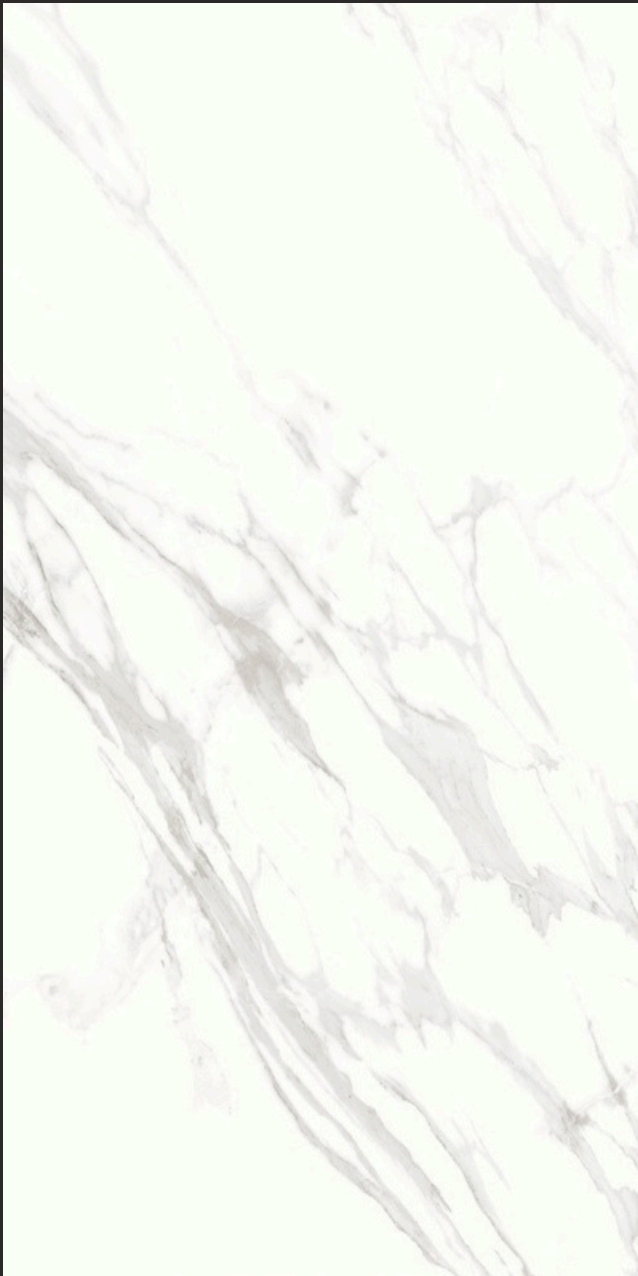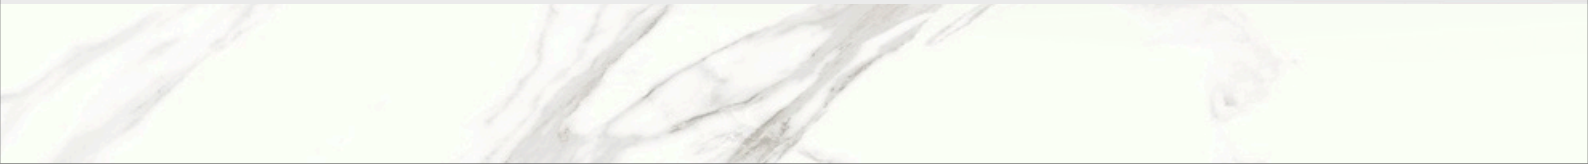




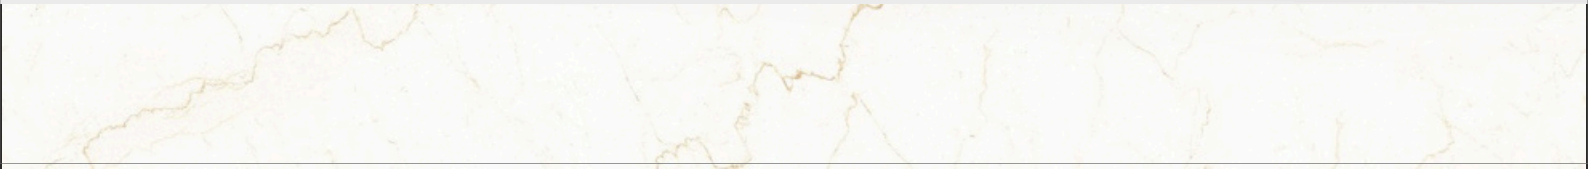




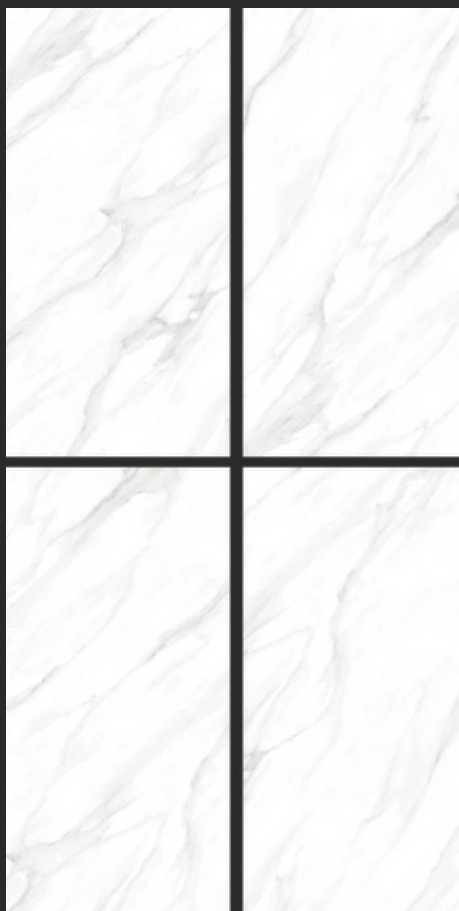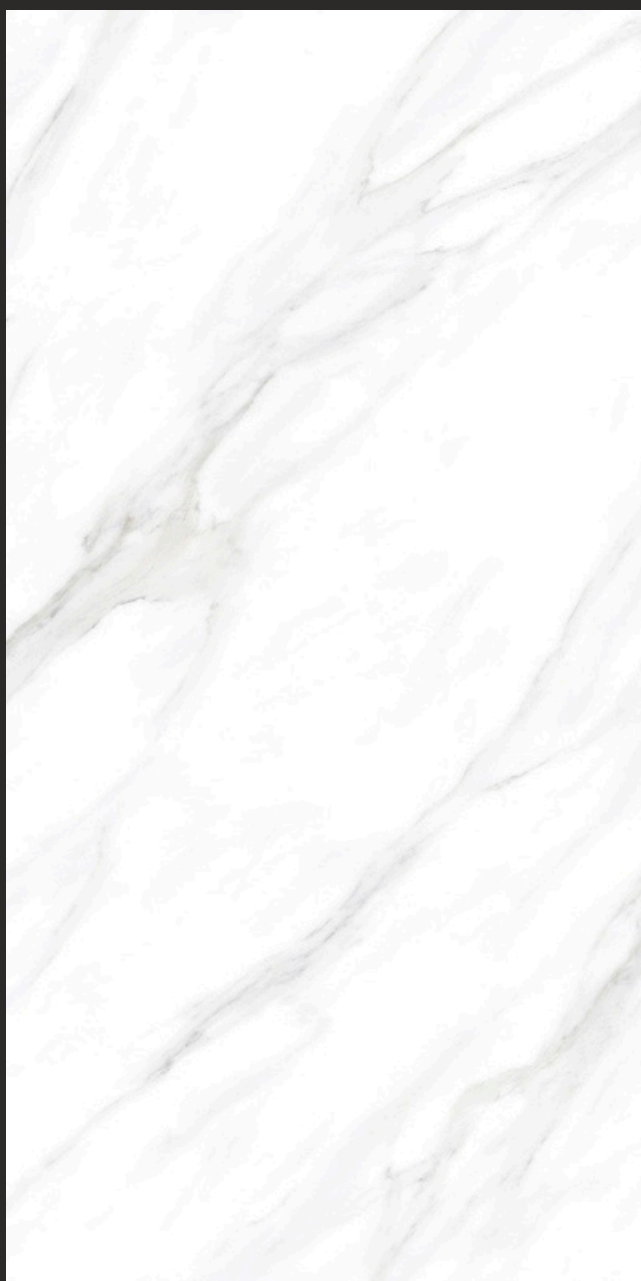



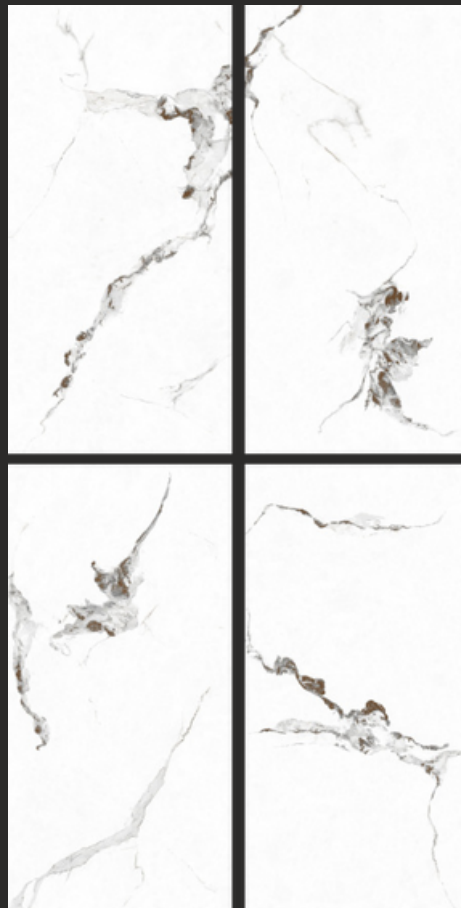




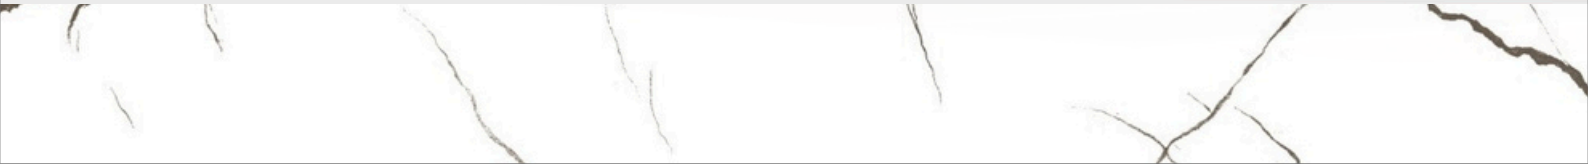





ENDLESS

Crafted From The Elements, Shaped By Intention, And Finished In Elegance.



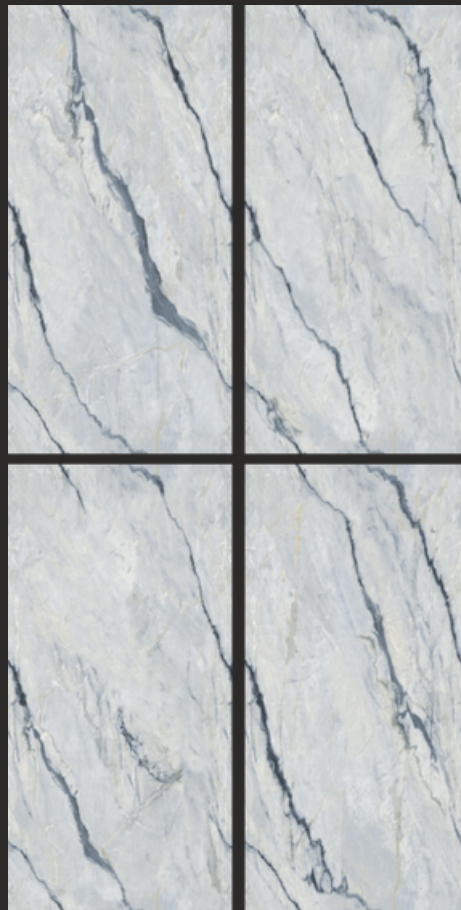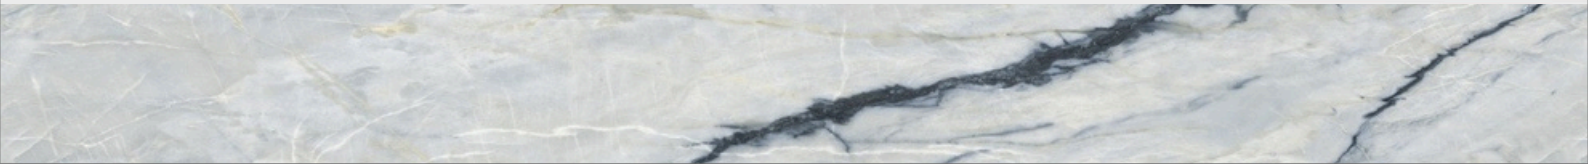



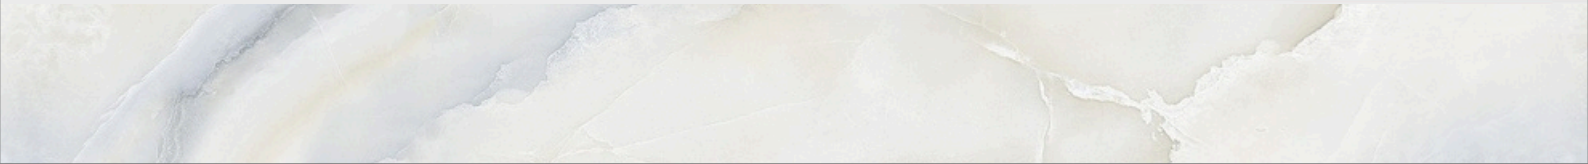














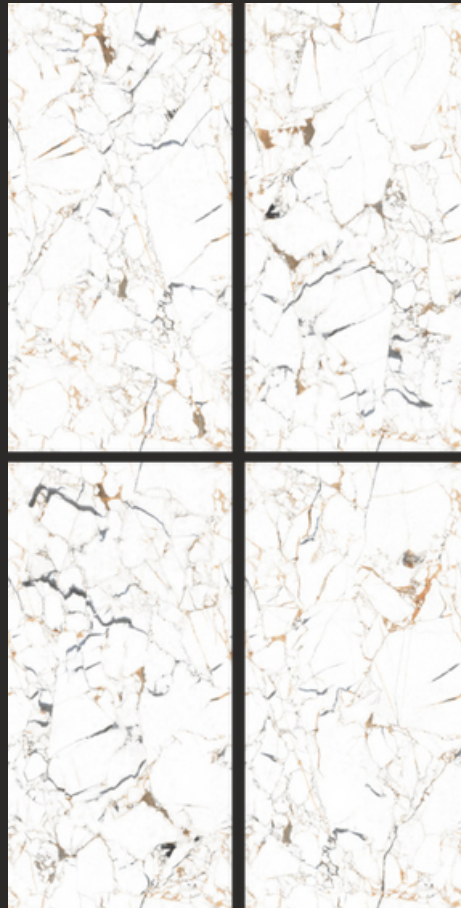










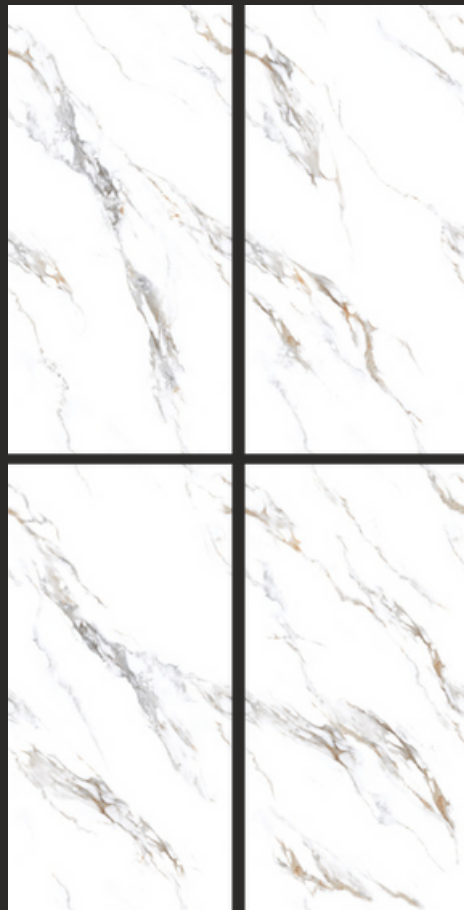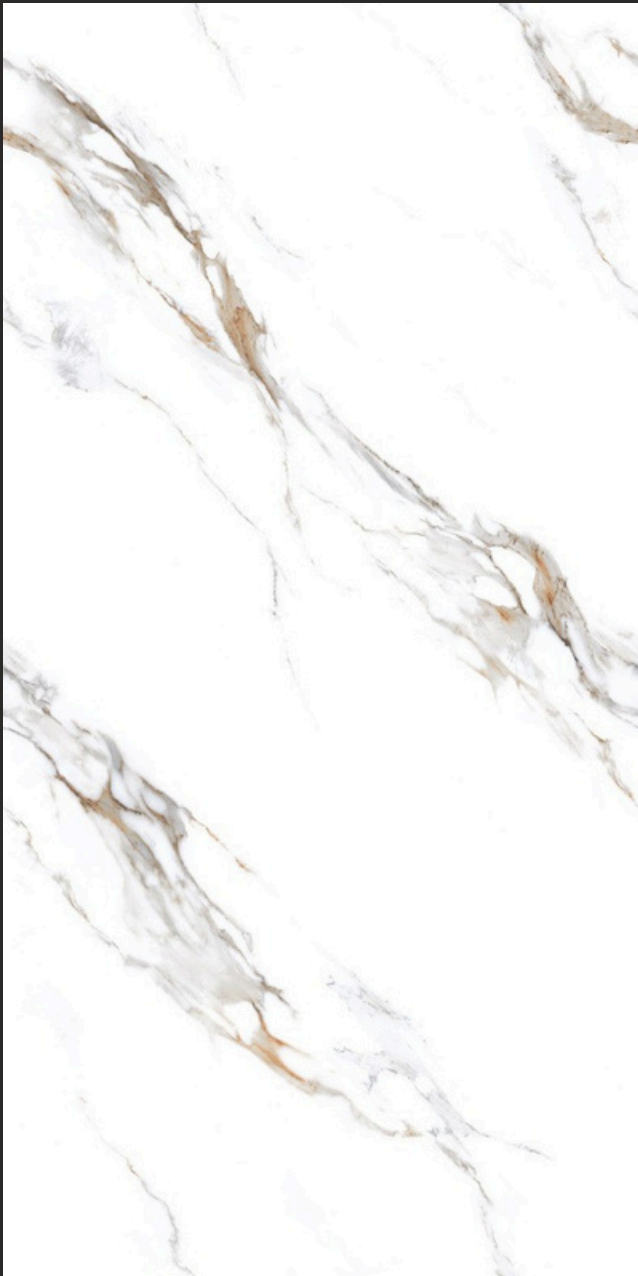




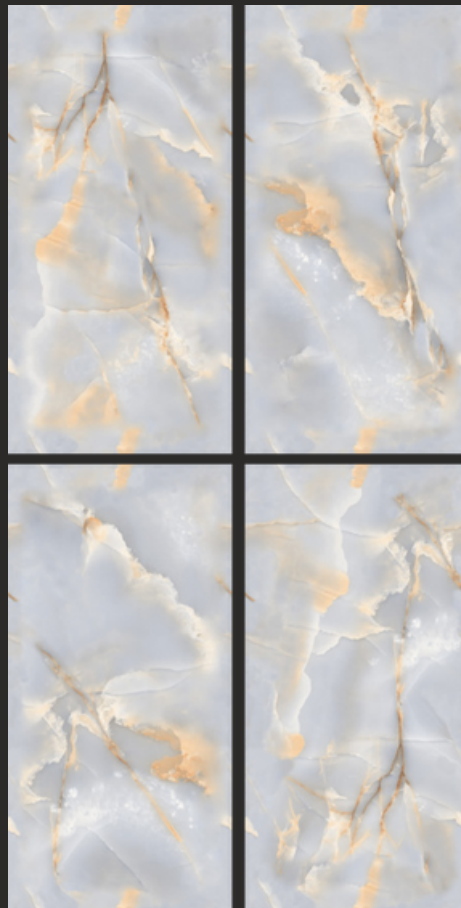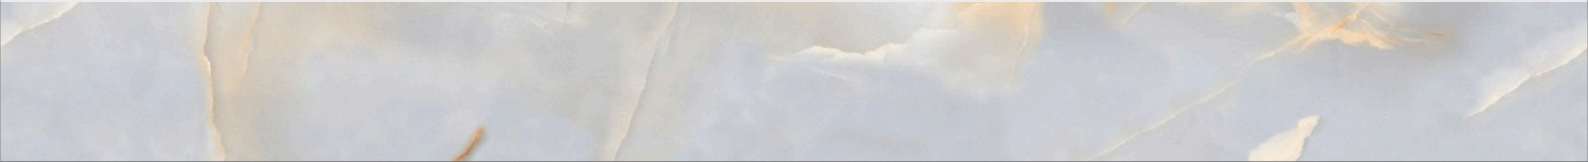



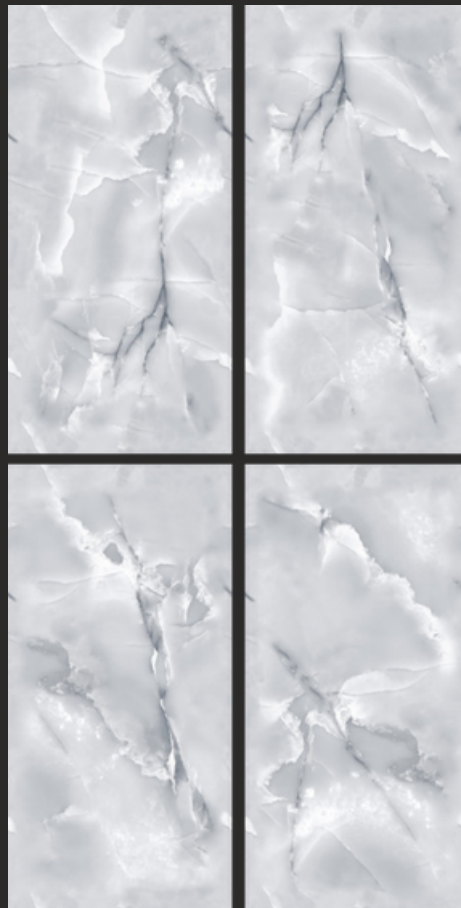




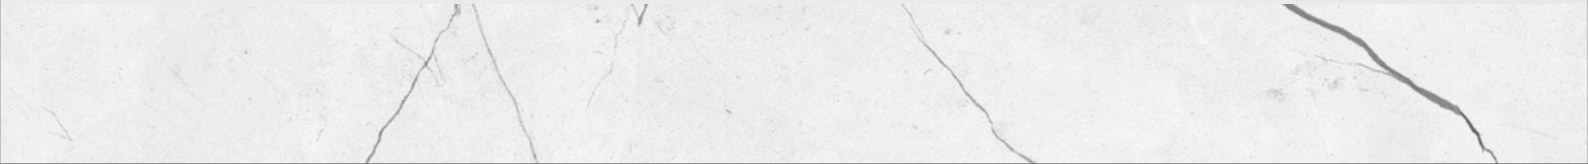










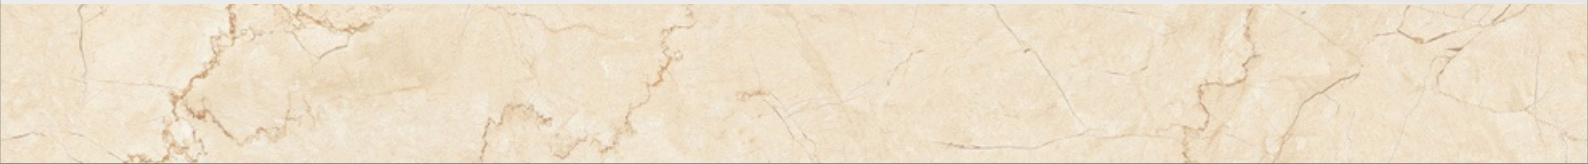




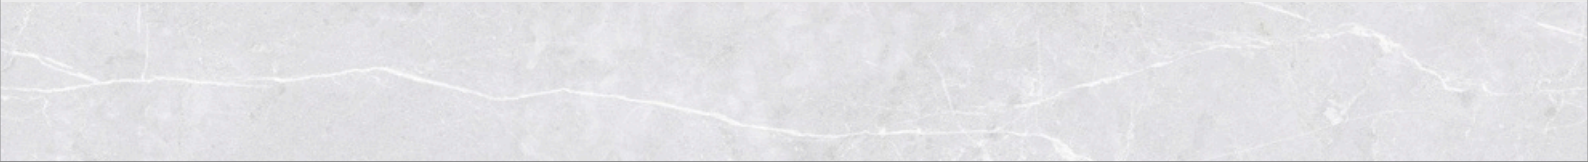



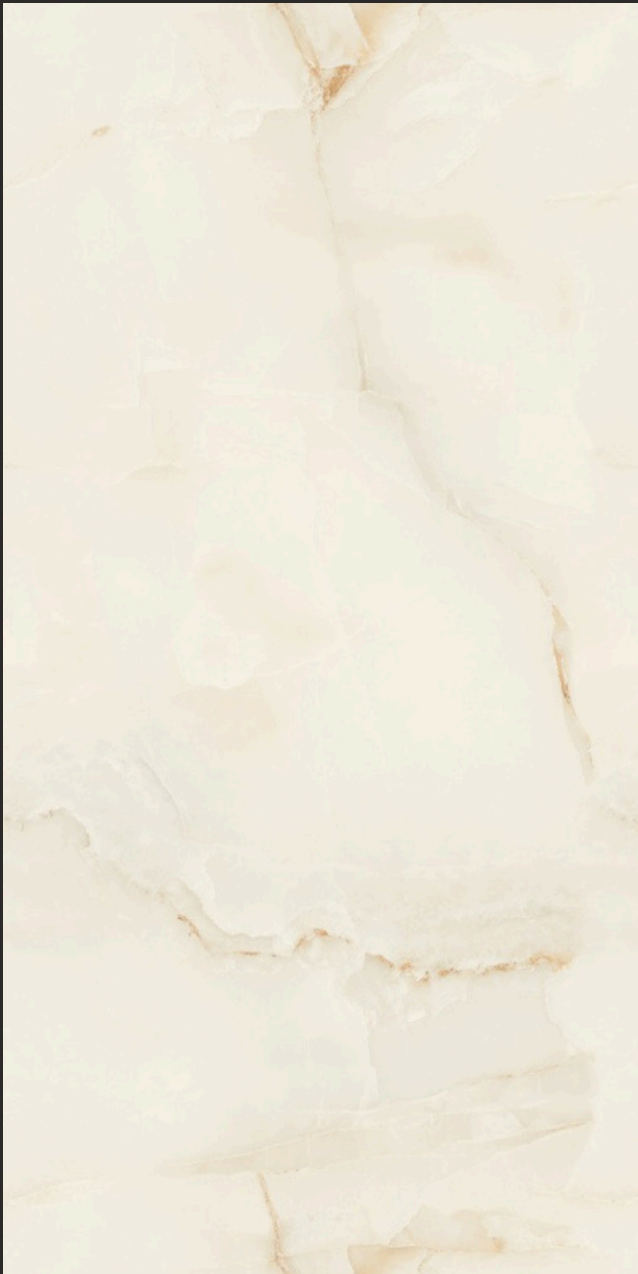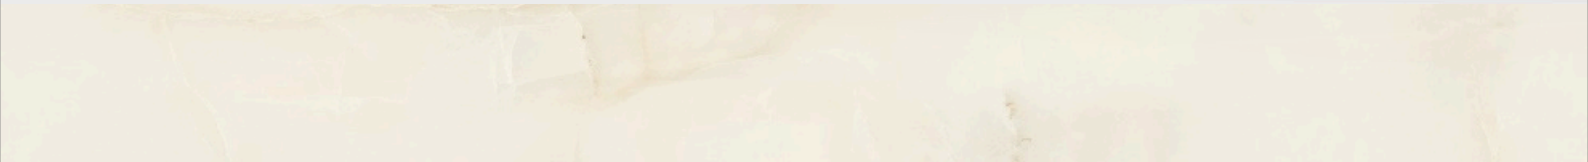



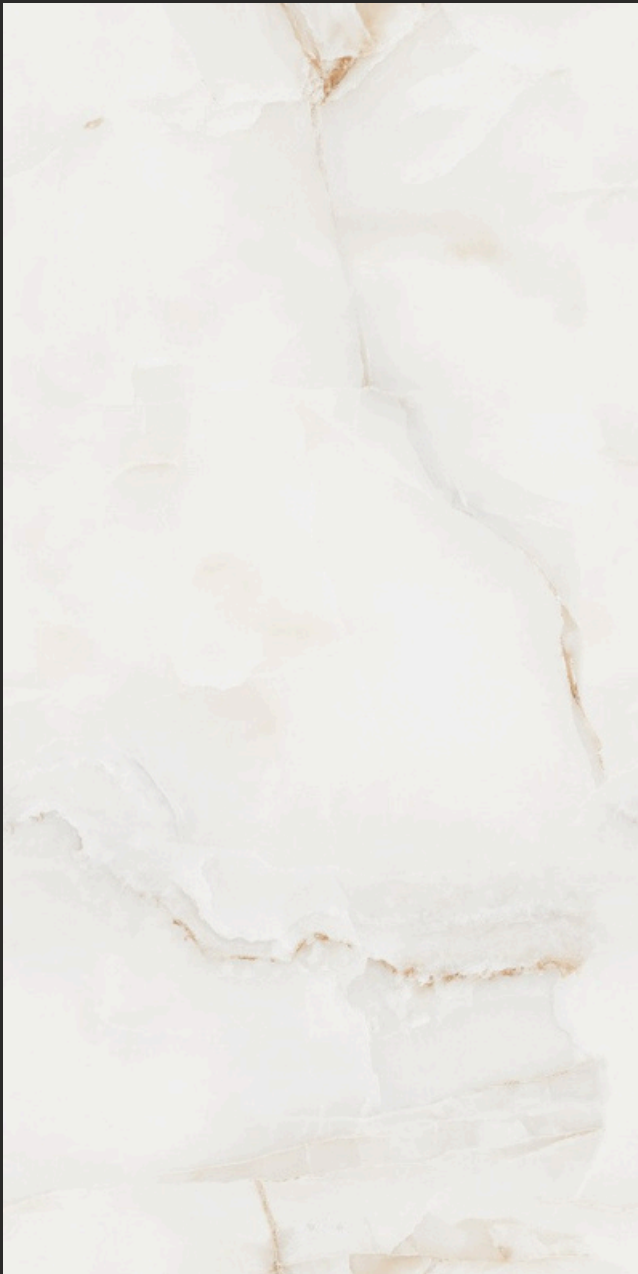



GLAZED VITRIFIED TILES TECHNICAL DETAILS

CHARACTERISTIC	STANDARD AS PER ISO-13006/EN14411 GROUP BIa	MEAN VALUE OF	TEST METHOD
REGULATORY PROPERTIES			
Deviation In Length & Width	± 0.50%	± 0.10%	ISO-10545-2
Deviation In Thickness	± 5.00%	± 4.00%	ISO-10545-2
Straightness Of Sides	± 0.50%	± 0.10%	ISO-10545-2
Rectangularity	± 0.50%	± 0.10%	ISO-10545-2
Surface Flatness	± 0.50%	± 0.20%	ISO-10545-2
Color Differences	Unaltered	No Change	ISO-10545-16
Glossiness	As per Mfg.	Min. 90%	GLOSSOMETER
STRUCTURAL PROPERTIES			
Water Absorption	< 0.50%	< 0.05%	ISO-10545-3
Apparent Density	>2.00 g/cc	>2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PROPERTIES			
Modulus of Rupture	Min. 35N/mm ²	Min. 40N/mm ²	ISO-10545-4
Breaking Strength	Min. 1300 N	Min. 2000 N	ISO-10545-4
Impact Resistance	As Per Mfg.	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PROPERTIES			
Surface Abrasion Resistance	As Per Mfg.	Min. Class-3	ISO-10545-7
Moh's Hardness	As Per Mfg.	Min. 4	EN 101
THERMO HYDROMETRIC PROPERTIES			
Frost Resistance	No Damage	No Damage	ISO-10545-12
Thermal Shock Resistance	No Damage	No Damage	ISO-10545-9
Moisture Expansion	Nil	Nil	ISO-10545-10
Thermal Expansion(COE)	Max 9.0x10 ⁻⁶	Max 6.5x10 ⁻⁶	ISO-10545-8
Crazing Resistance	As Per Mfg.	Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES			
Chemical Resistance	No Damage	No Damage	ISO-10545-13
Stain Resistance	Resistant	Resistant	ISO-10545-14
SAFETY PROPERTIES			
Slip Resistance	>0.40	>0.40	ISO-10545-17
Fire Resistance	As Per Mfg.	Fireproof	N. A.
Lead & Cadmium given off by glazed tiles	As Per Mfg.	Does not yield Pb & Cd	ISO-10545-15

Note: Colour shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserves the right to change the specifications without prior notice. Sometime variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.

PACKING DETAILS

Size	Pcs. / Box	Coverage Area / Box	Weight / Box
600x1200 MM	2	1.44 sq. mtr.	27.5 kg.

ANAKON CERAMICS LLP

**Address - 301, Maruti Tower, New Alap Park, Morbi,
Gujrat-363641.**

**Corp. Office No. 411, Fourth Floor, Ansal Chamber-II,
6, Bhikaji Cama Place, New Delhi-110066.**

Phone Number: 18003132100 , 9053303333

Email: info@anakon.in , tile@anakon.in



ANAKON

FLOOR & WALL TILES