

600x1200mm



Make A Statement With Surfaces That Exude Timeless  
Beauty Through Understated Elegance,




Luxury Through Our Glossy Surfaces That Are  
Meant To Elevate The Grace Of Your Space.









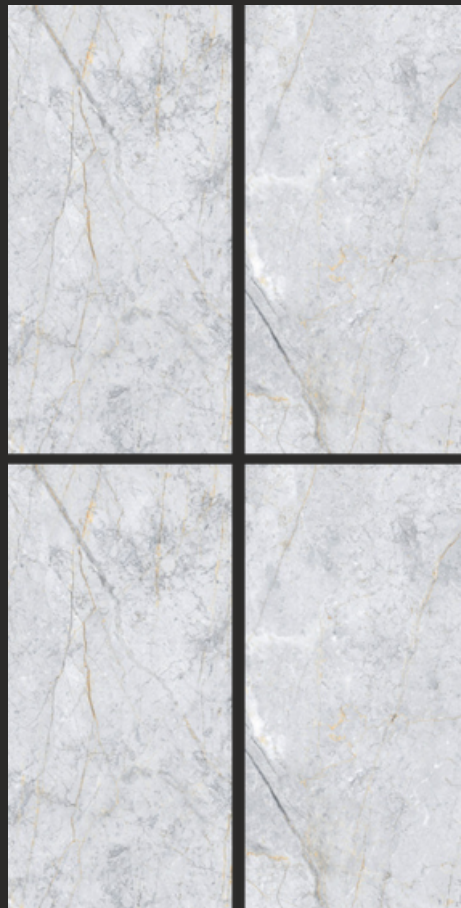

















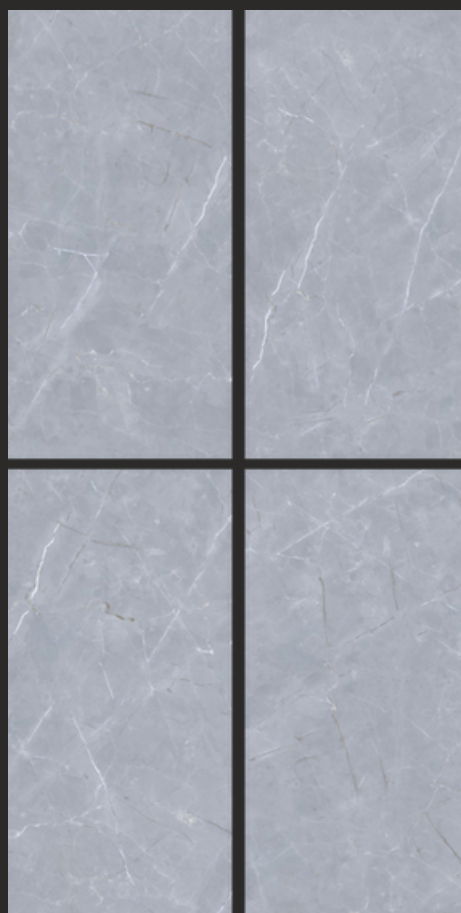








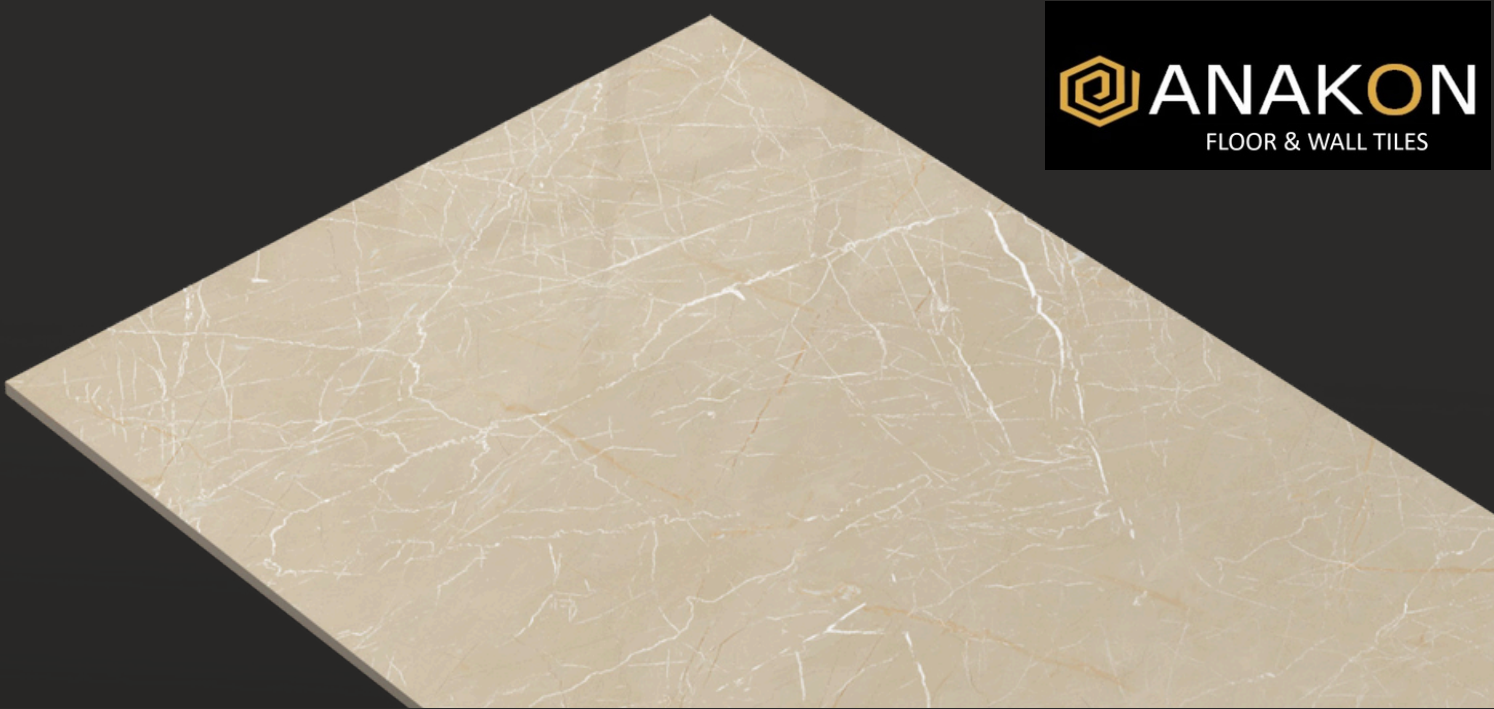







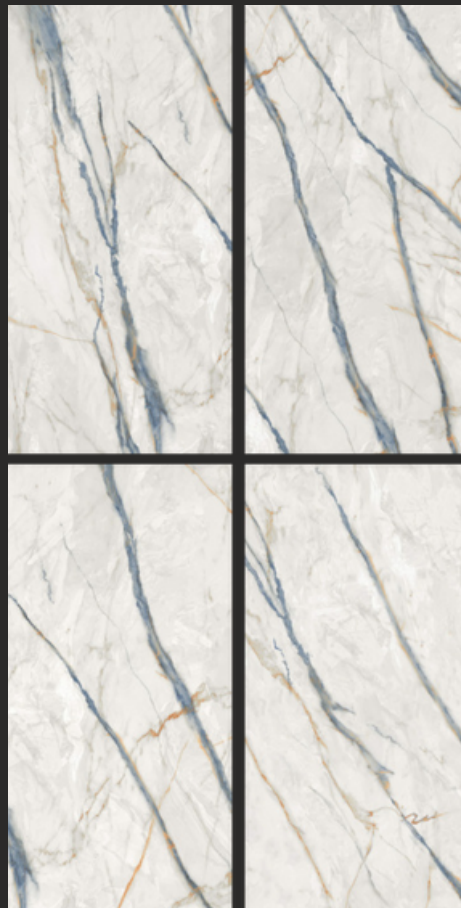





























DRESSING  
ROOM

JP

JP














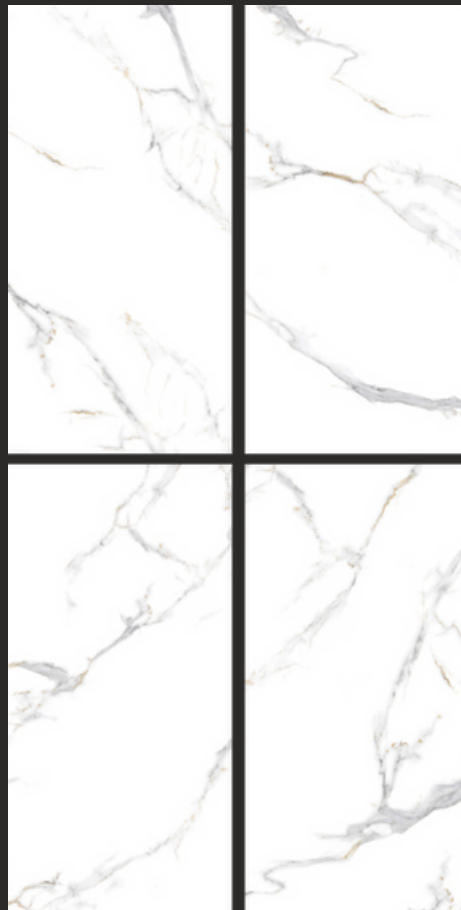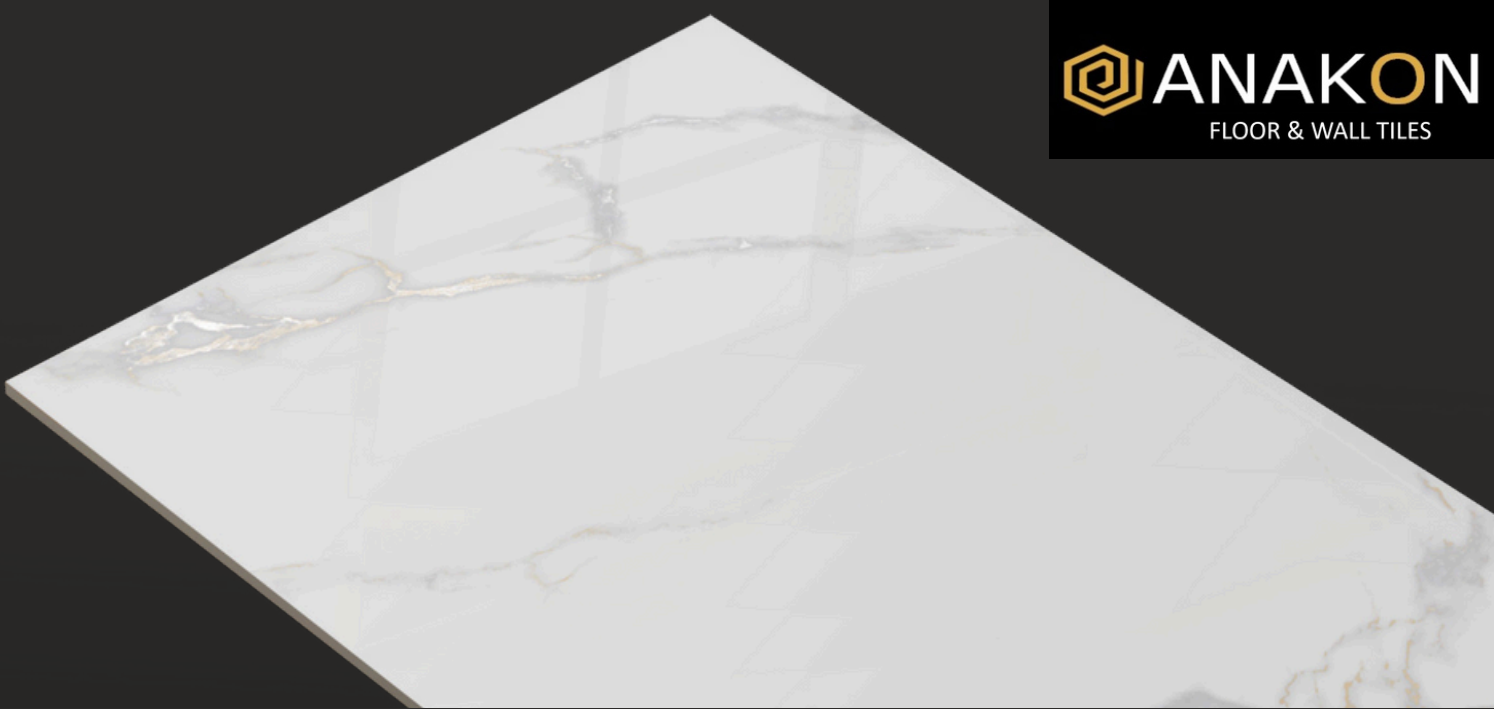







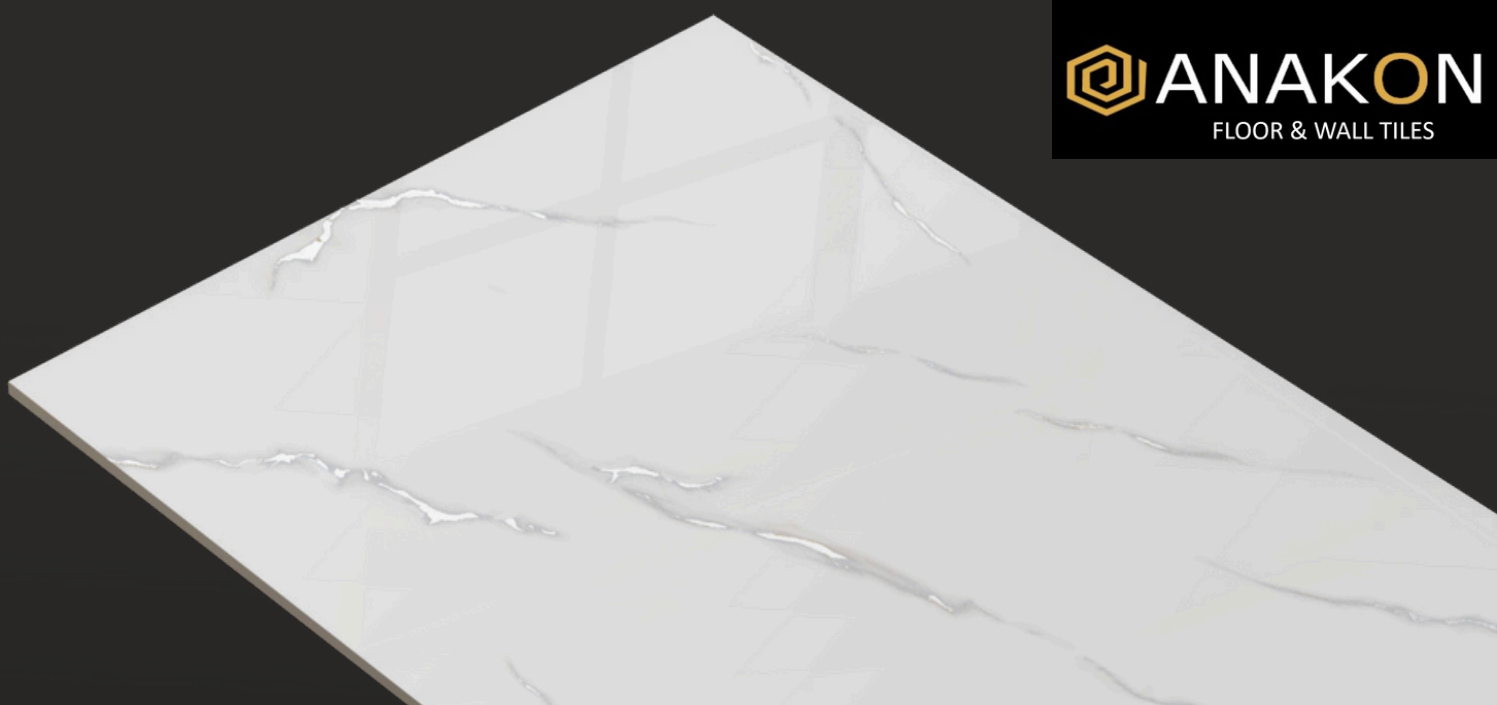










# ENDLESS

We are here with the  
future of creativity  
for you with the  
essence of nature.





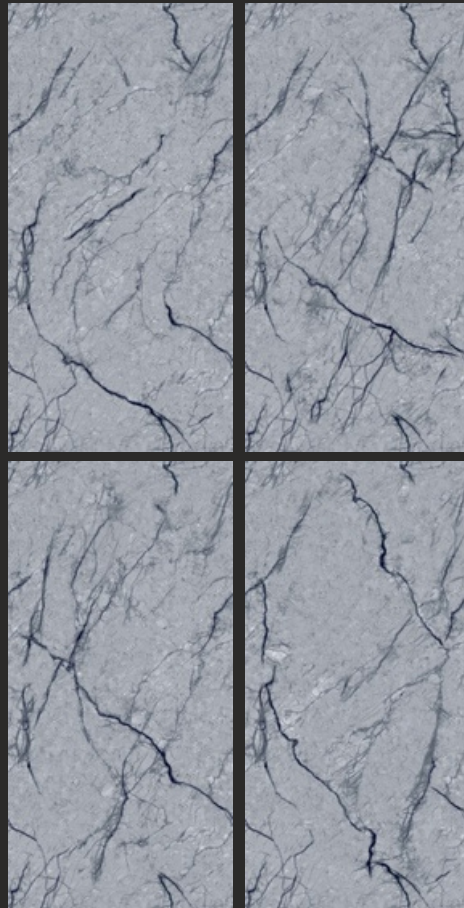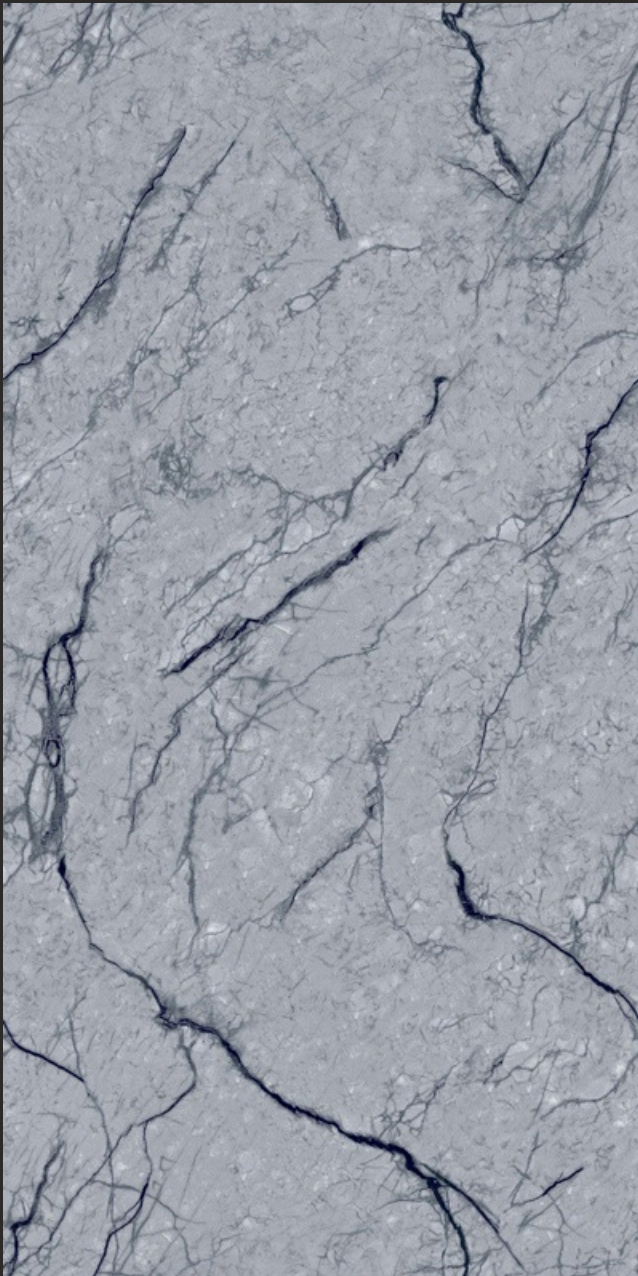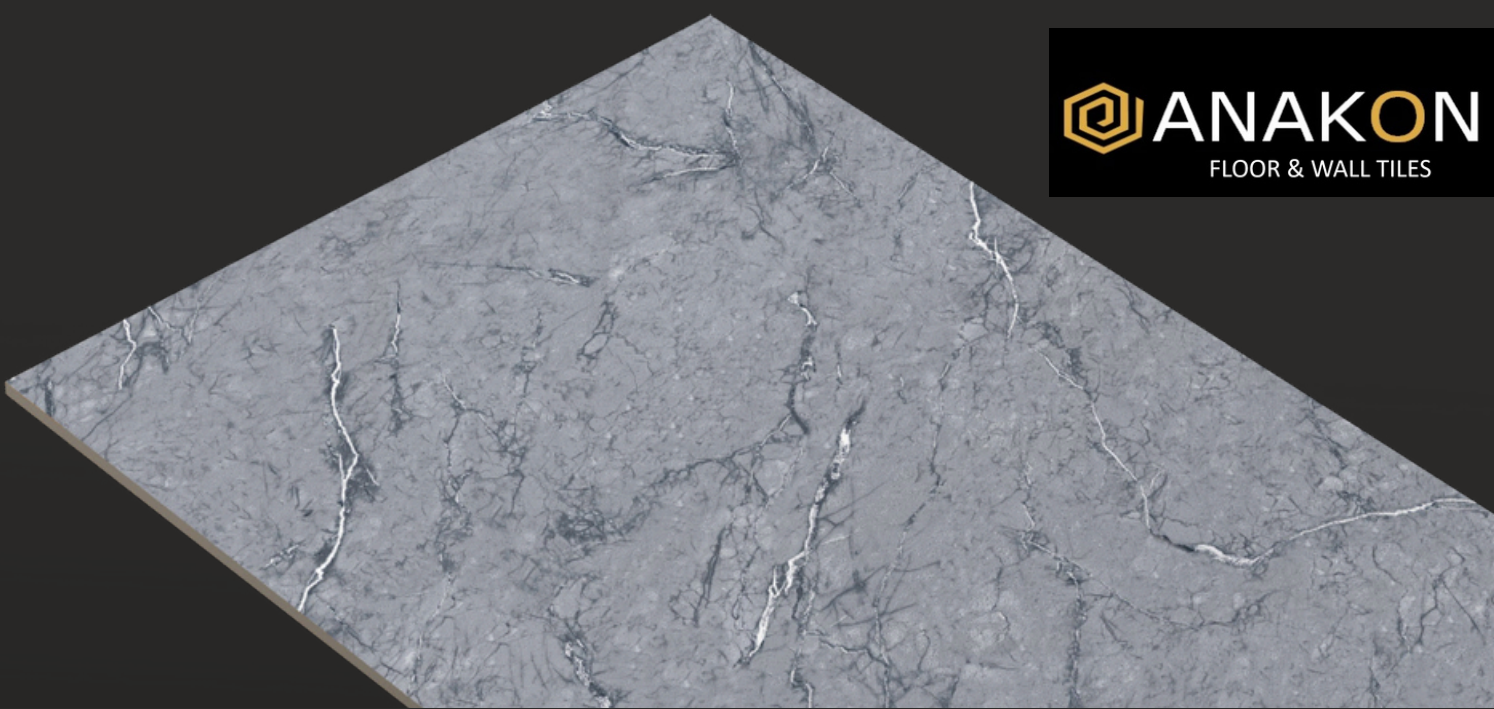


































—










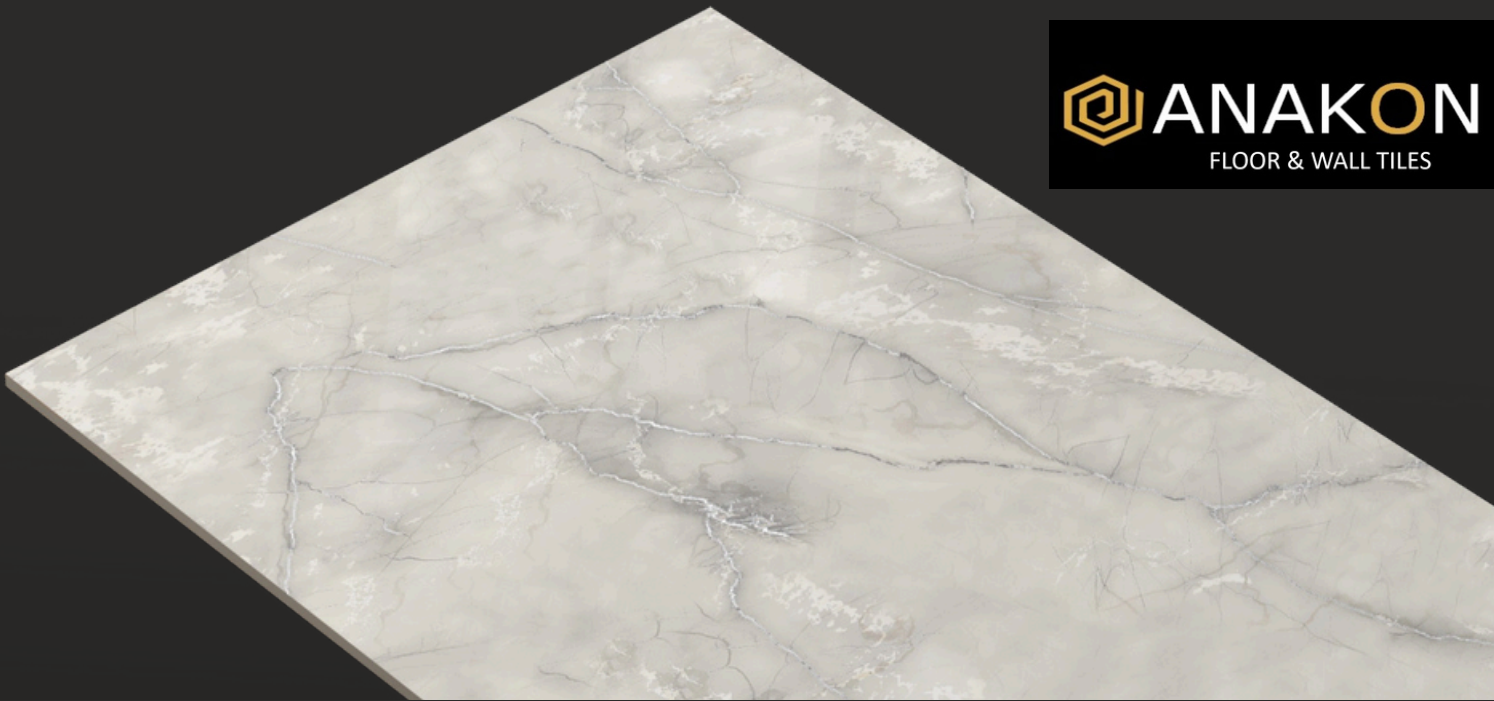







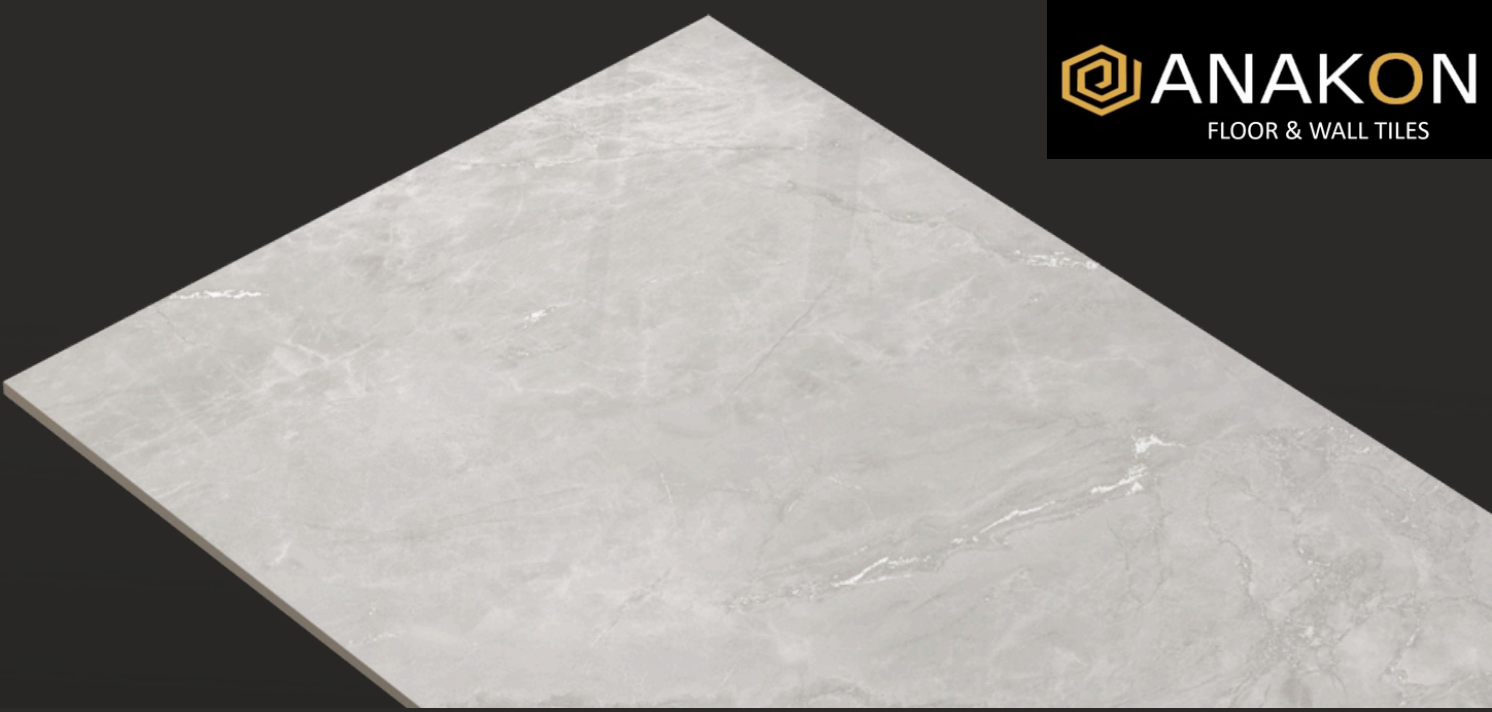

























—


















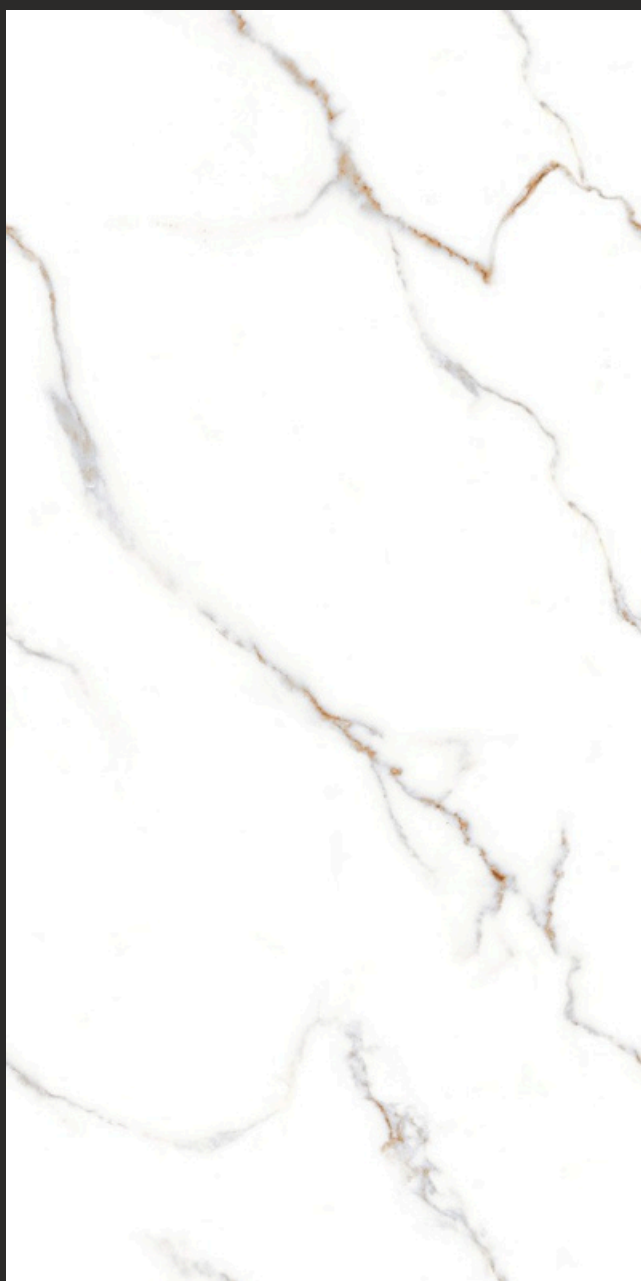
































































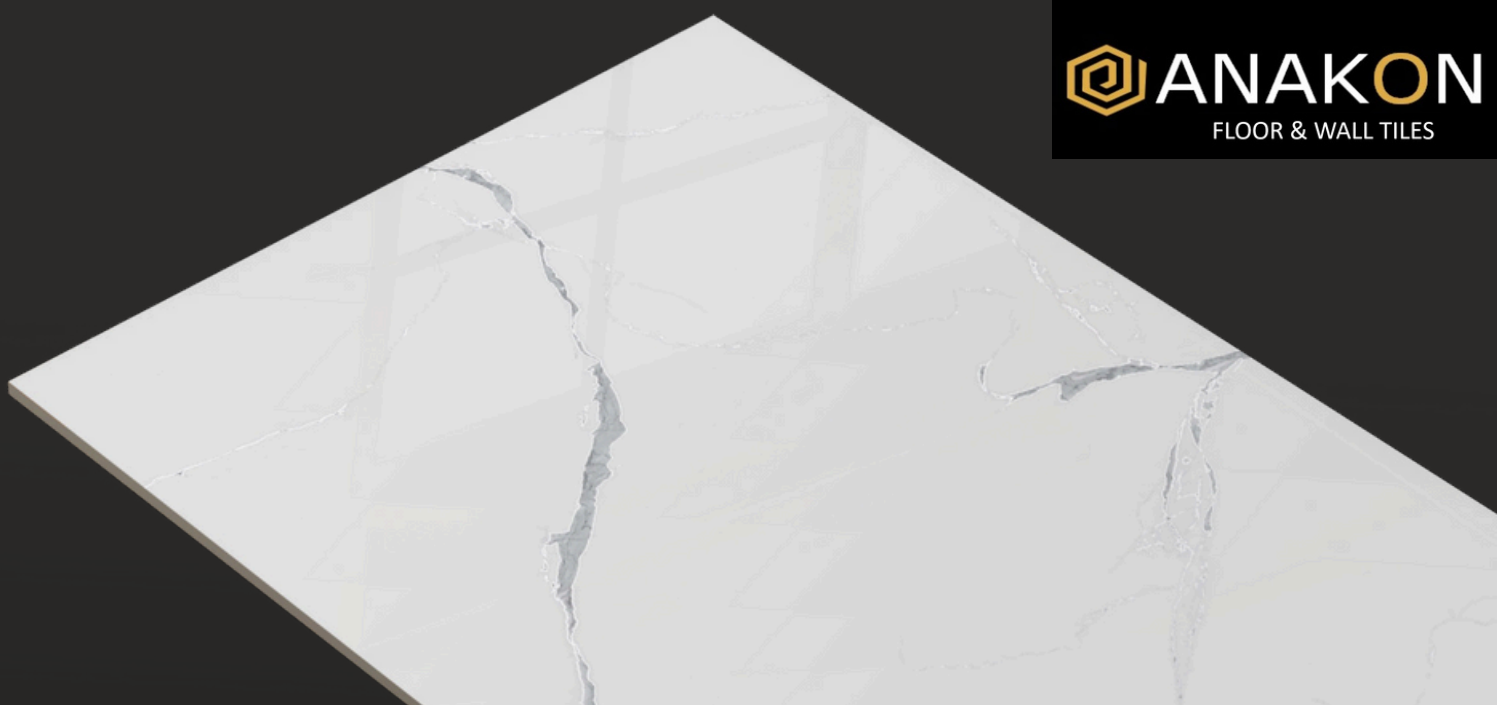



















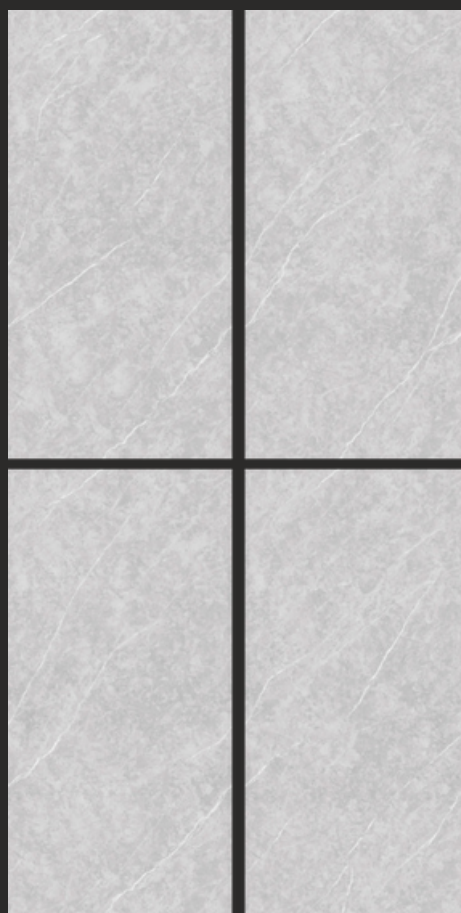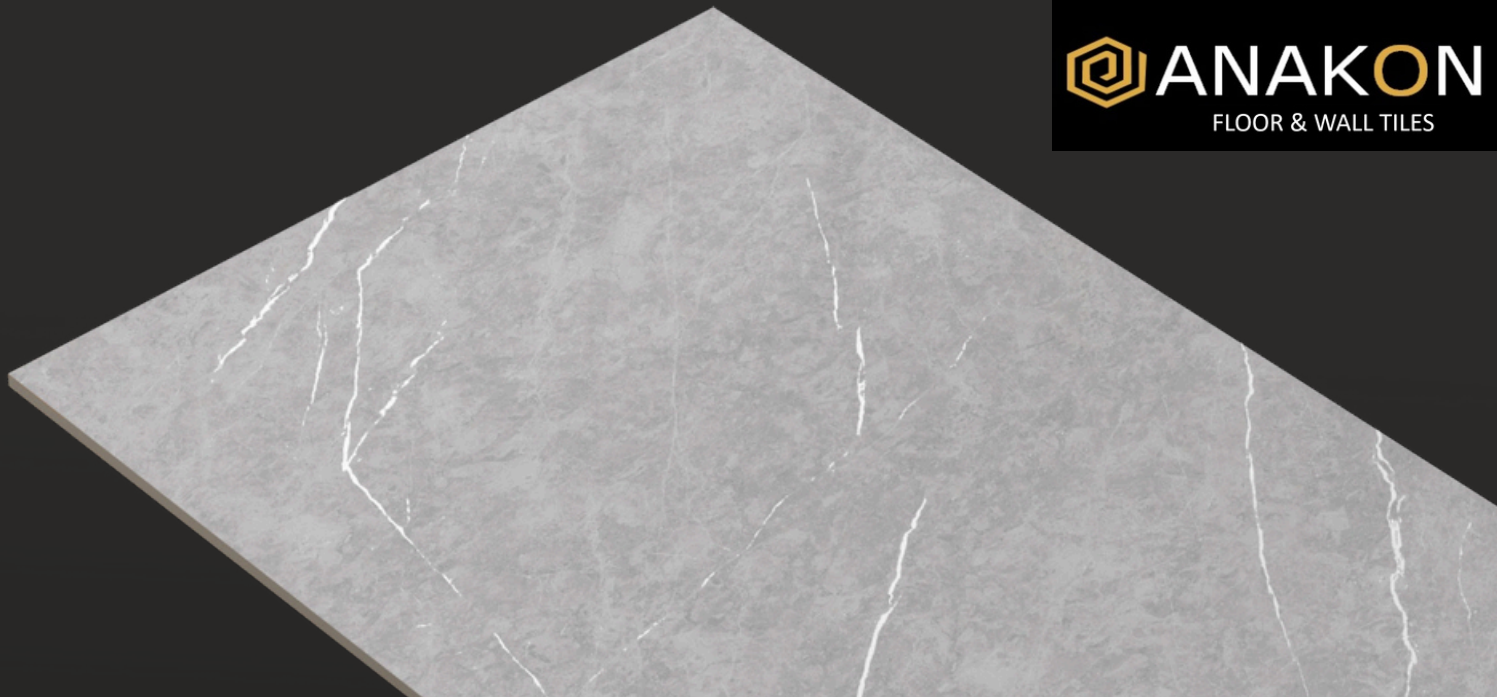








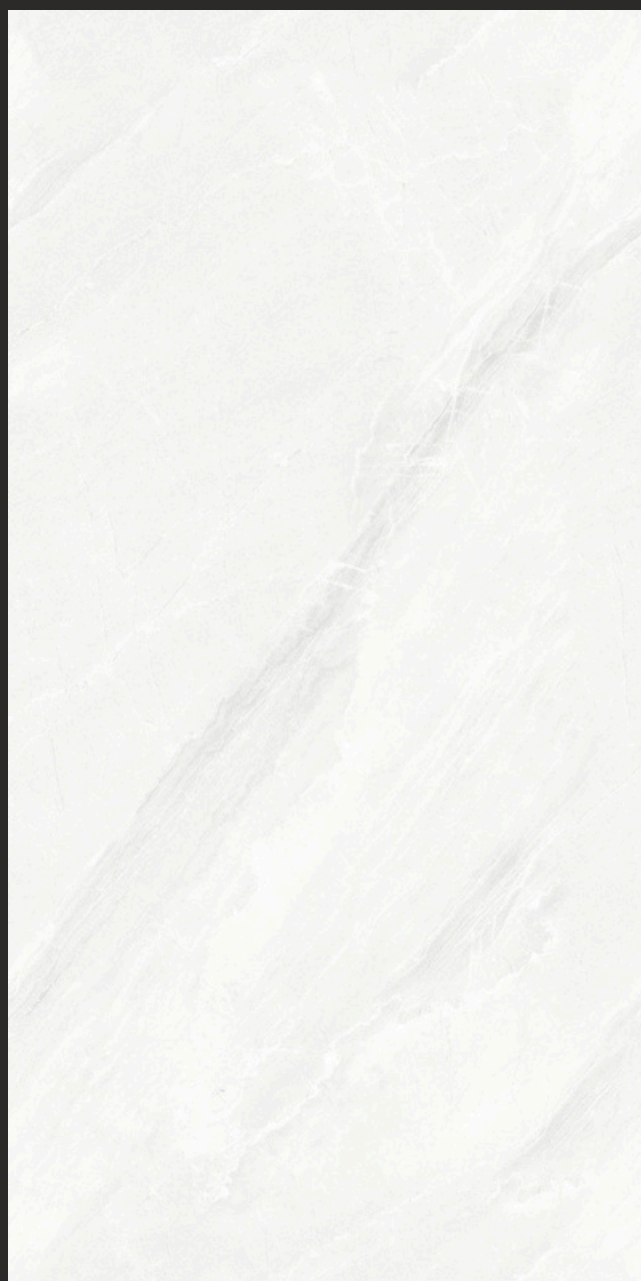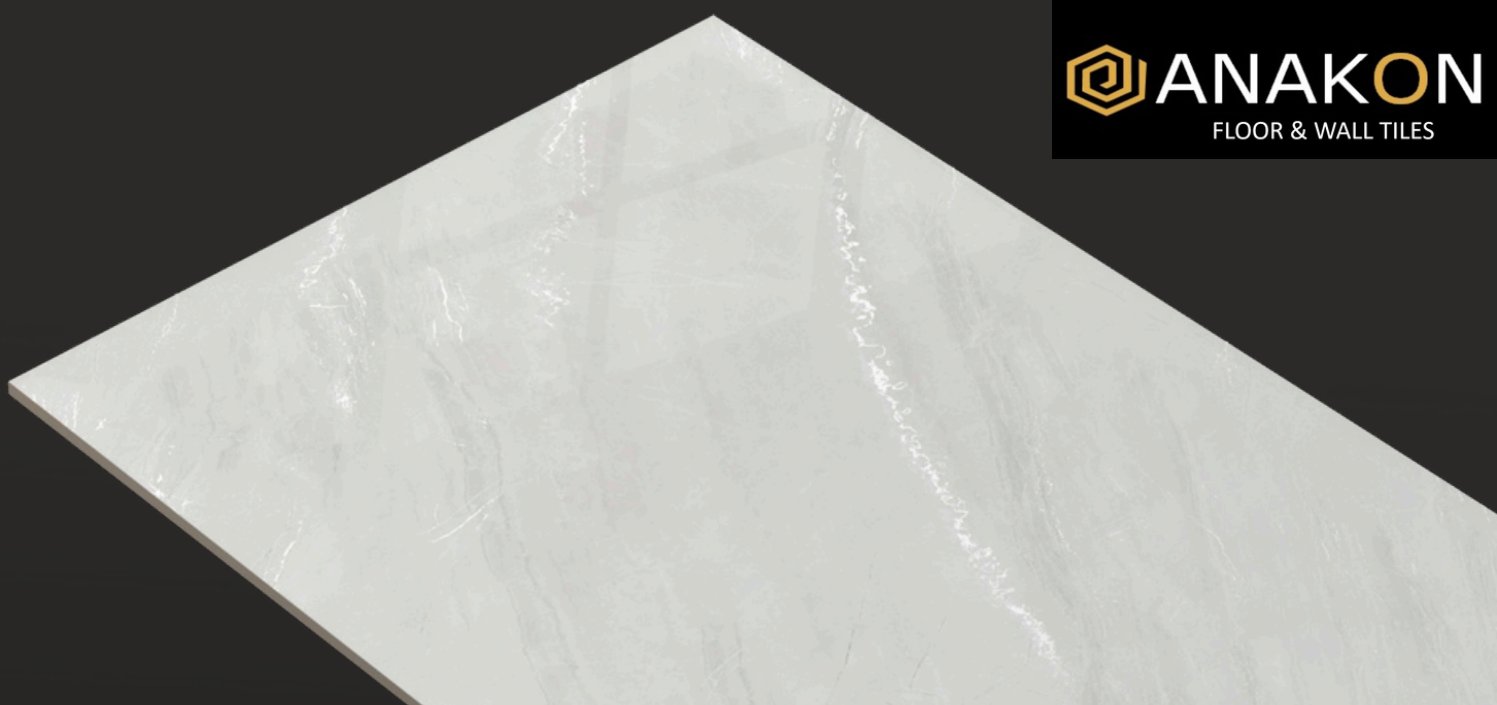







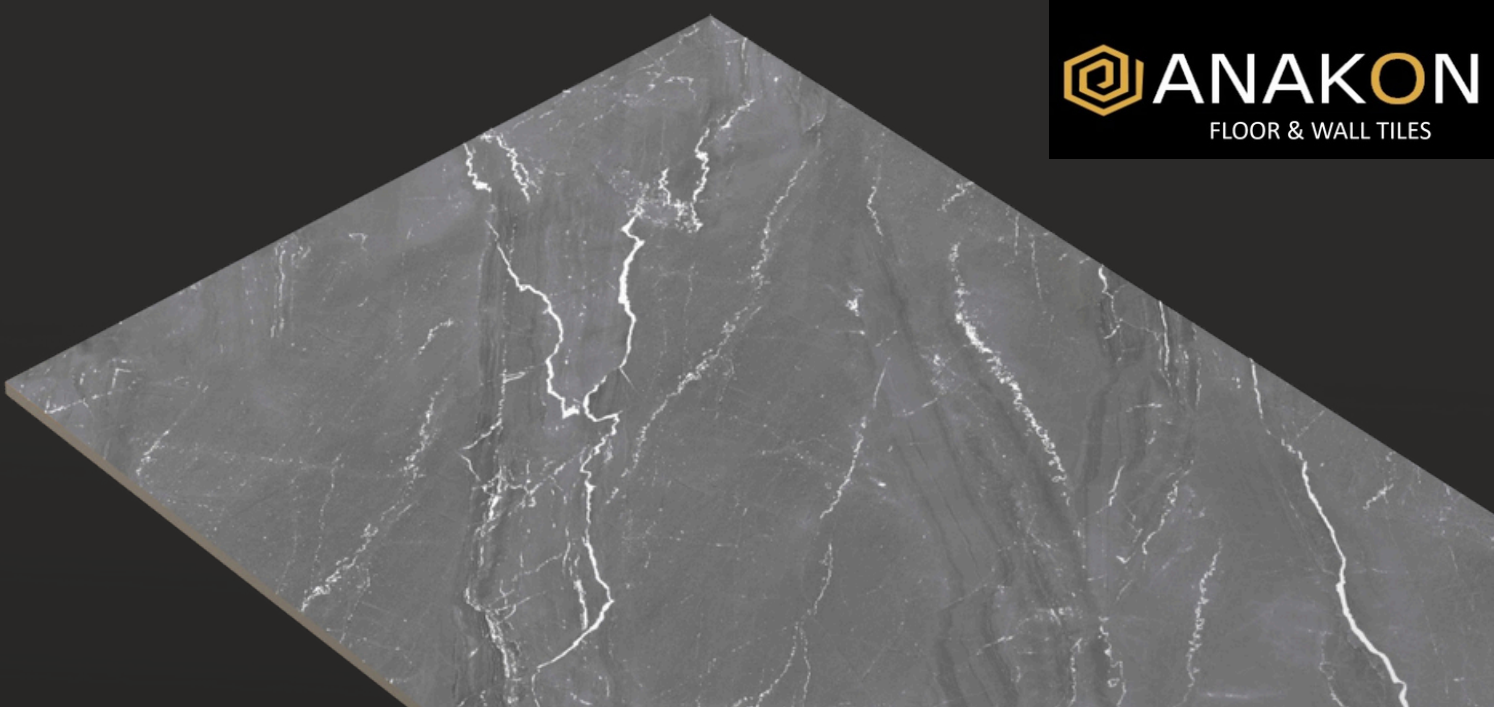
























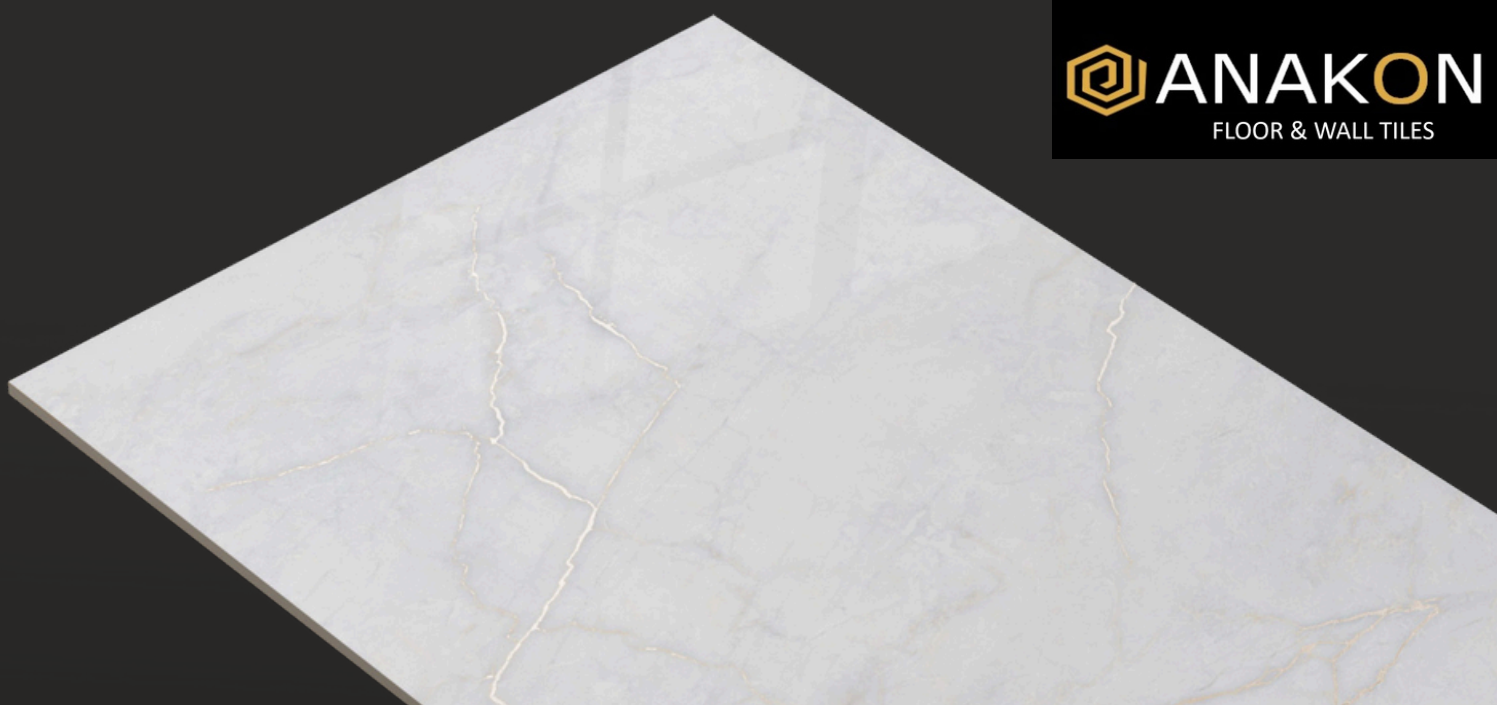
















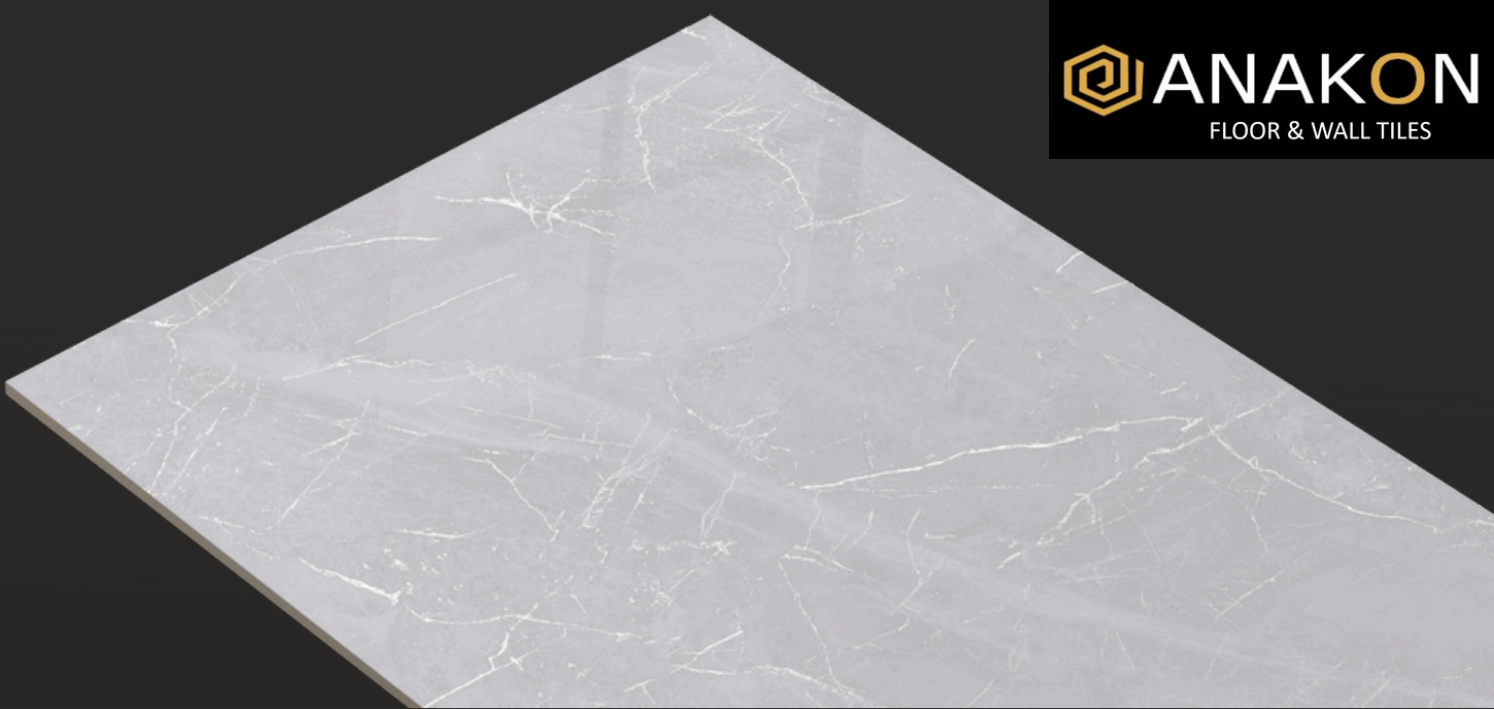

















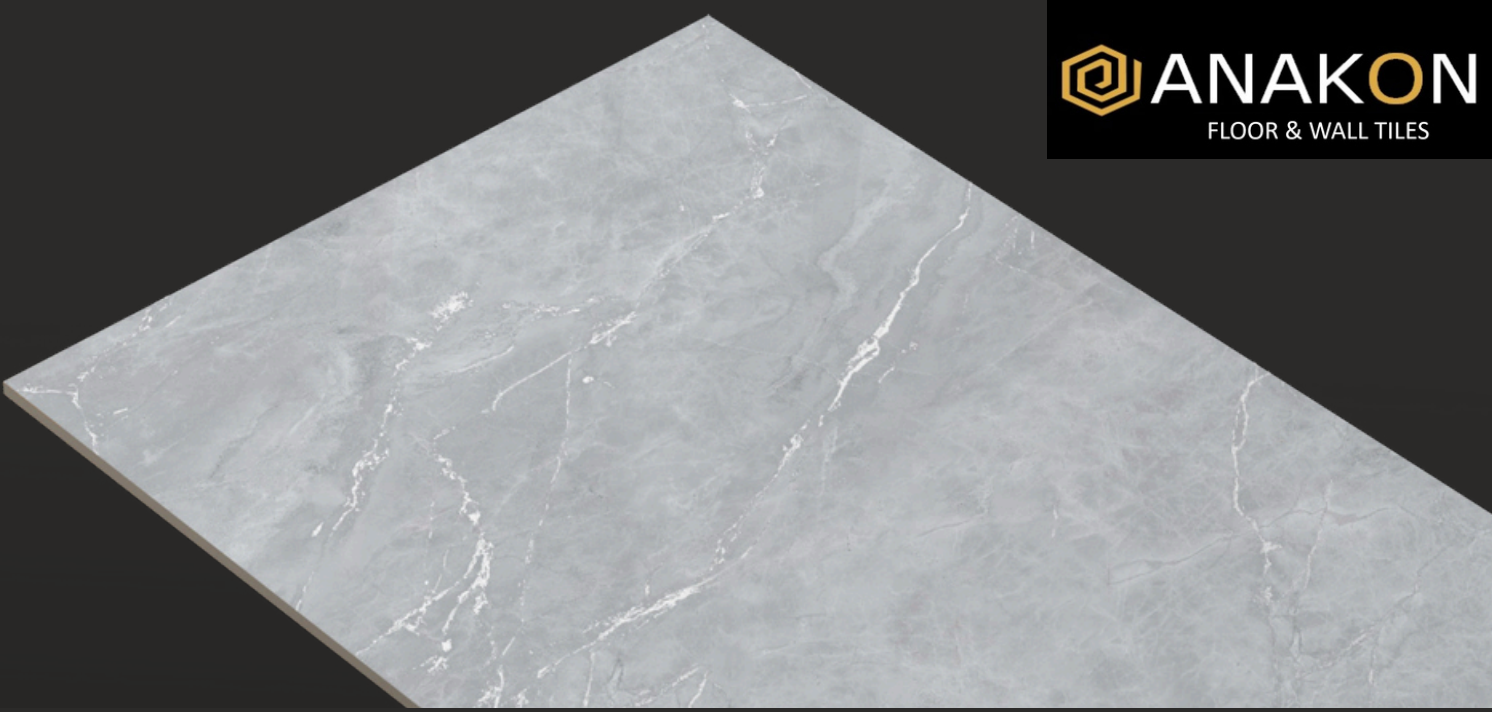







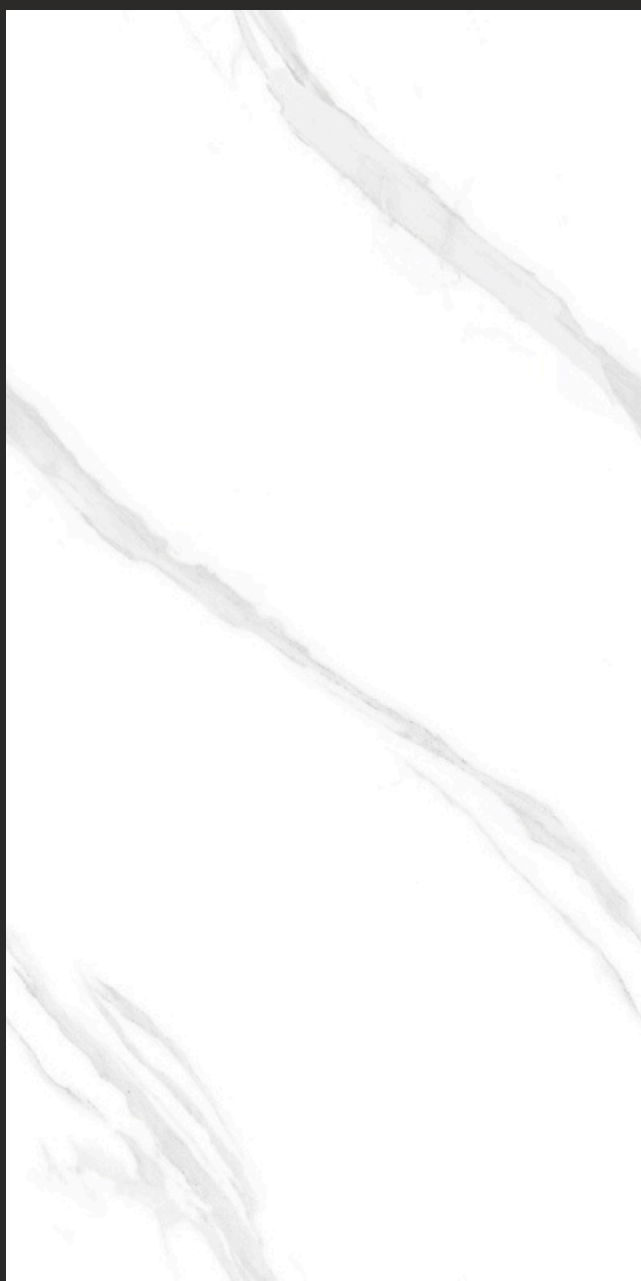
























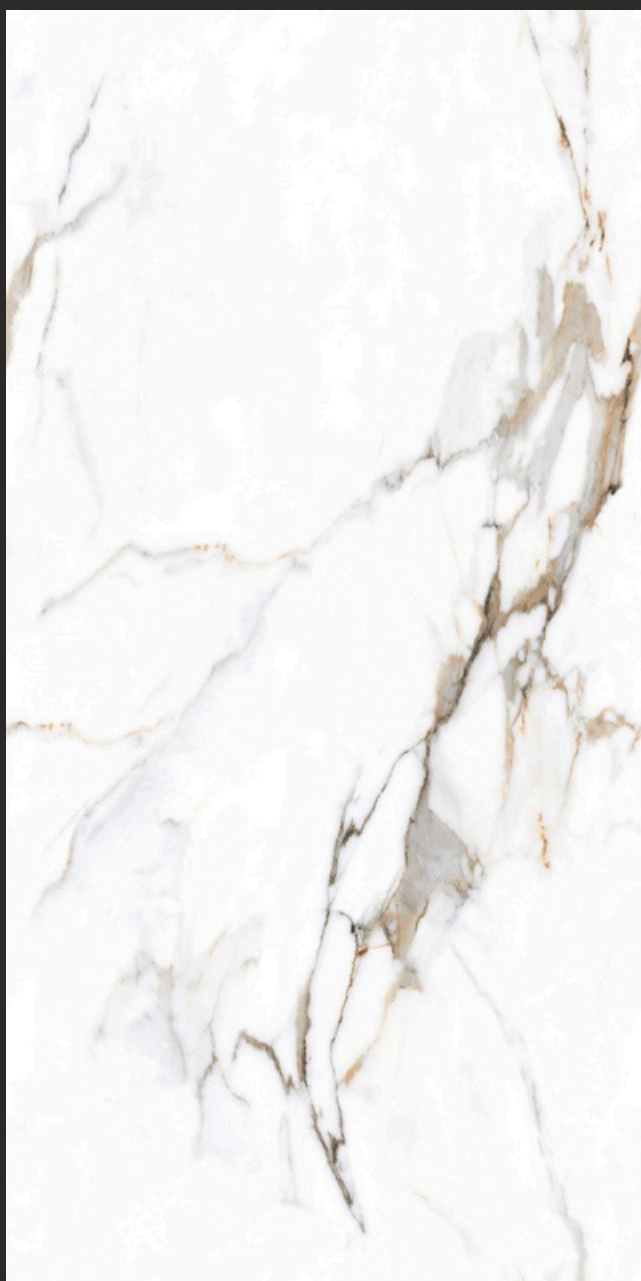















## GLAZED VITRIFIED TILES TECHNICAL DETAILS

CHARACTERISTIC	STANDARD AS PER ISO-13006/EN14411 GROUP BIa	MEAN VALUE OF	TEST METHOD
<b>REGULATORY PROPERTIES</b>			
Deviation In Length & Width	± 0.50%	± 0.10%	ISO-10545-2
Deviation In Thickness	± 5.00%	± 4.00%	ISO-10545-2
Straightness Of Sides	± 0.50%	± 0.10%	ISO-10545-2
Rectangularity	± 0.50%	± 0.10%	ISO-10545-2
Surface Flatness	± 0.50%	± 0.20%	ISO-10545-2
Color Differences	Unaltered	No Change	ISO-10545-16
Glossiness	As per Mfg.	Min. 90%	GLOSSOME TER
<b>STRUCTURAL PROPERTIES</b>			
Water Absorption	< 0.50%	< 0.05%	ISO-10545-3
Apparent Density	>2.00 g/cc	>2.10 g/cc	DIN 51082
<b>MASSIVE MECHANICAL PROPERTIES</b>			
Modulus of Rupture	Min. 35N/mm2	Min. 40N/mm2	ISO-10545-4
Breaking Strength	Min. 1300 N	Min. 2000 N	ISO-10545-4
Impact Resistance	As Per Mfg.	Min. 0.55	ISO-10545-5
<b>SURFACE MECHANICAL PROPERTIES</b>			
Surface Abrasion Resistance	As Per Mfg.	Min. Class-3	ISO-10545-7
Moh's Hardness	As Per Mfg.	Min. 4	EN 101
<b>THERMO HYDROMETRIC PROPERTIES</b>			
Frost Resistance	No Damage	No Damage	ISO-10545-12
Thermal Shock Resistance	No Damage	No Damage	ISO-10545-9
Moisture Expansion	Nil	Nil	ISO-10545-10
Thermal Expansion(COE)	Max 9.0x10 <sup>-6</sup>	Max 6.5x10 <sup>-6</sup>	ISO-10545-8
Crazing Resistance	As Per Mfg.	Min. 10 Cycle	ISO-10545-11
<b>CHEMICAL PROPERTIES</b>			
Chemical Resistance	No Damage	No Damage	ISO-10545-13
Stain Resistance	Resistant	Resistant	ISO-10545-14
<b>SAFETY PROPERTIES</b>			
Slip Resistance	>0.40	>0.40	ISO-10545-17
Fire Resistance	As Per Mfg.	Fireproof	N. A.
Lead & Cadmium given off by glazed tiles	As Per Mfg.	Does not yield Pb & Cd	ISO-10545-15

Note: Colour shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserves the right to change the specifications without prior notice. Sometime variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.

## PACKING DETAILS

Size	Pcs. / Box	Coverage Area / Box	Weight / Box
600x1200 MM	2	1.44 sq. mtr.	27.5 kg.



## **ANAKON CERAMICS LLP**

**Address - 301, Maruti Tower, New Alap Park, Morbi,  
Gujrat-363641.**

**Corp. Office No. 411, Fourth Floor, Ansal Chamber-II,  
6, Bhikaji Cama Place, New Delhi-110066.**

**Phone Number: 18003132100 , 9053303333**

**Email: [info@anakon.in](mailto:info@anakon.in) , [tile@anakon.in](mailto:tile@anakon.in)**



# **ANAKON**

## **FLOOR & WALL TILES**